


Installation guide

Before installing, please refer to below table and make sure the correct cut-out size and reserve space up from the ceiling.

Cut-Outs	Ceiling thickness	Depth up from the ceiling
125x125 mm(+2/-0mm)	5~25 mm	>50 mm

Connection guide for In-house power cord and the LED driver's AC side


- 1 Connect in-house power cord to the LED driver's AC side.

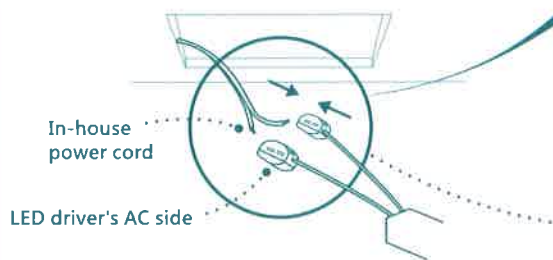

! Please turn off the AC power.

Pull up the orange clip of the terminal to be 90 degree

Connect the L wire with LED driver's brown wire, and connect the N wire with LED driver's blue wire

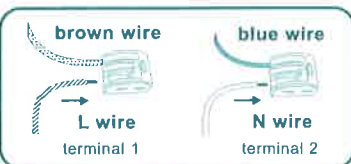


- 2 Put the LED driver on the ceiling.




Connect LED driver's connector (DC side) to the connector of Down Light

- 3 Connect LED driver's connector (DC side) to the connector of Down Light.

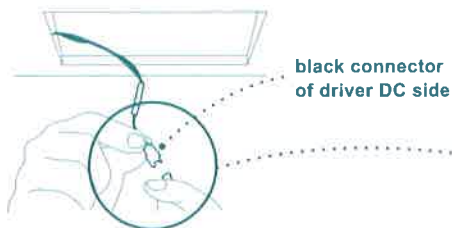

! Make sure the correct connected direction and position.

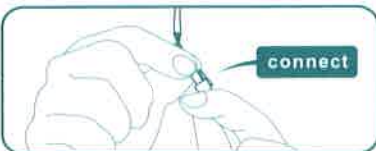

Installation guide for Luminaire


- 4 Move two side's spring buckles of the Down Light backward.



! Protective film is attached in front side of Down Light. Do not remove the protective film while installing in order to remain the Down Light surface clean.

move backward


- 5 Insert the Down Light into the cut-out hole and push it into position to finish installation. (Remove the protective film after finishing installation.)

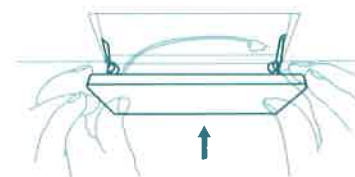

Remove the protective film

Guide for taking off Down Light

- 1 Pull down one side of the Down Light.

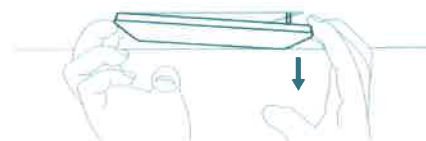

! Be careful the dropping dust.

- 2 Press two side's spring buckles, and pull down the Down Light.

