




LoveWing - Modern



- Integrated design with LED and driver built in.
- Large beam angle design and 8%~10% uplight enhance the spatial brightness.
- Bright, comfortable and uniform light, low glare.
- Stylish arc appearance, black and white collocation creates floating vision feeling.
- Easy installation includes suspended type and surface-mounted type.
- Ideal replacement for fluorescent tubes, suitable for office, conference room or general indoor space.
- Energy-saving, eco-friendly for the environment.

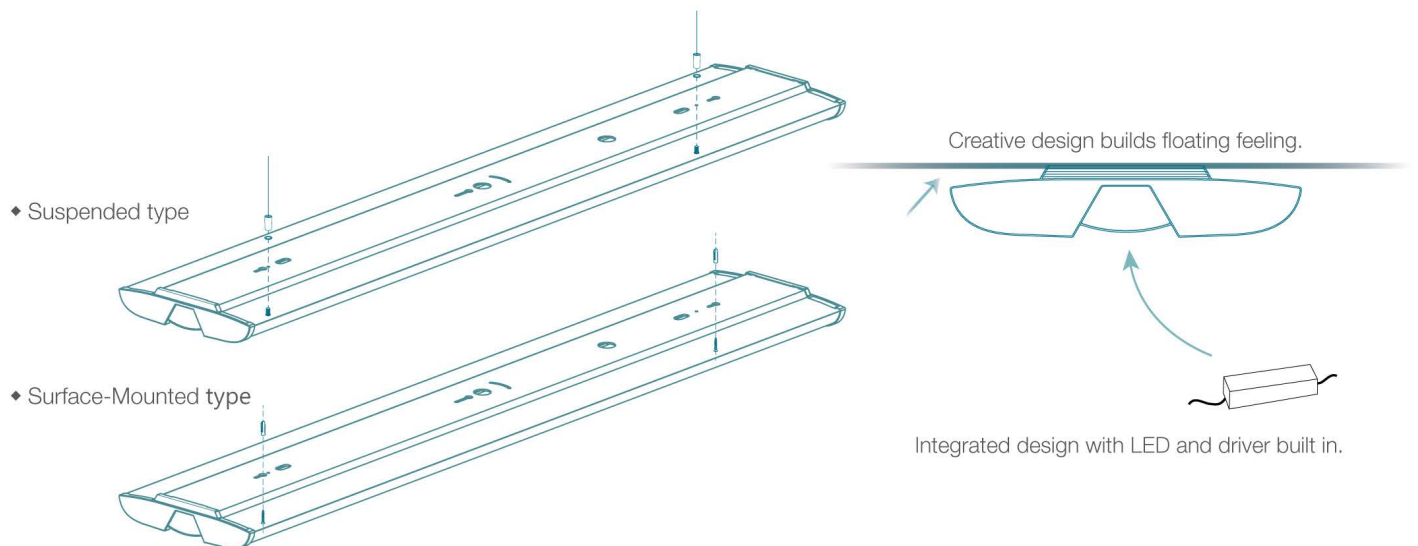

CRI : 80 ; Color Temperature : 5700K (5310K-6020K) / 4000K (3650K-4150K) / 3000K (2900K-3200K)

Model		DP480-xxYP							
Dimension	1197 x 225 x 46 mm								
Power Consumption	41.2 w		54.8 w		34.7 w		53.8 w		
Color Temperature	5700K / 4000K	3000K	5700K / 4000K	3000K	5700K / 4000K	3000K	5700K / 4000K	3000K	
Lumious Flux	3750 lm	3450 lm	4500 lm	4200 lm	3200 lm	3000 lm	4400 lm	4100 lm	
Illumination (1m)	1000 lux	920 lux	1220 lux	1140 lux	860 lux	800 lux	1200 lux	1120 lux	
Illumination (2m)	250 lux	230 lux	305 lux	285 lux	215 lux	200 lux	300 lux	280 lux	
Power Factor	PF > 0.9				NO PFC				

- xx indicates power consumption of luminaire ; Y indicates Color Temperature of luminaire, B:3000K; D:4000K; F:5000K; J:5300K; G:5700K
- The above specification is the standard value, the company reserves the right to information revise.