

UNITE™


CATALOGUE 2014/2015


UNITE™

UNITE™




LED LIGHTING

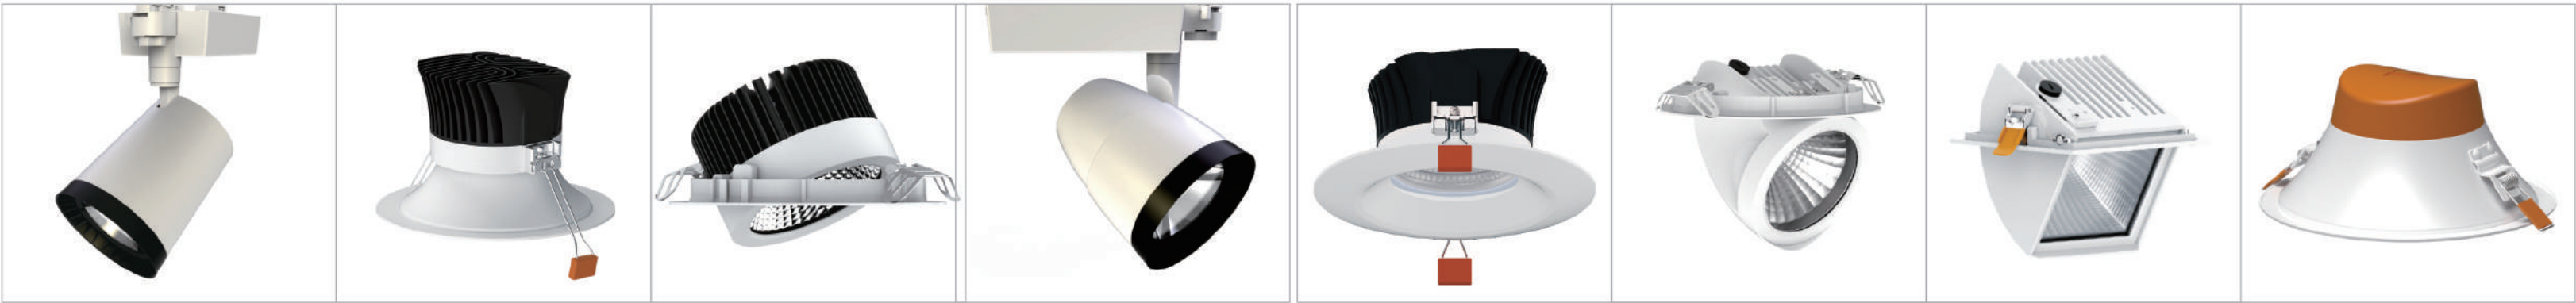

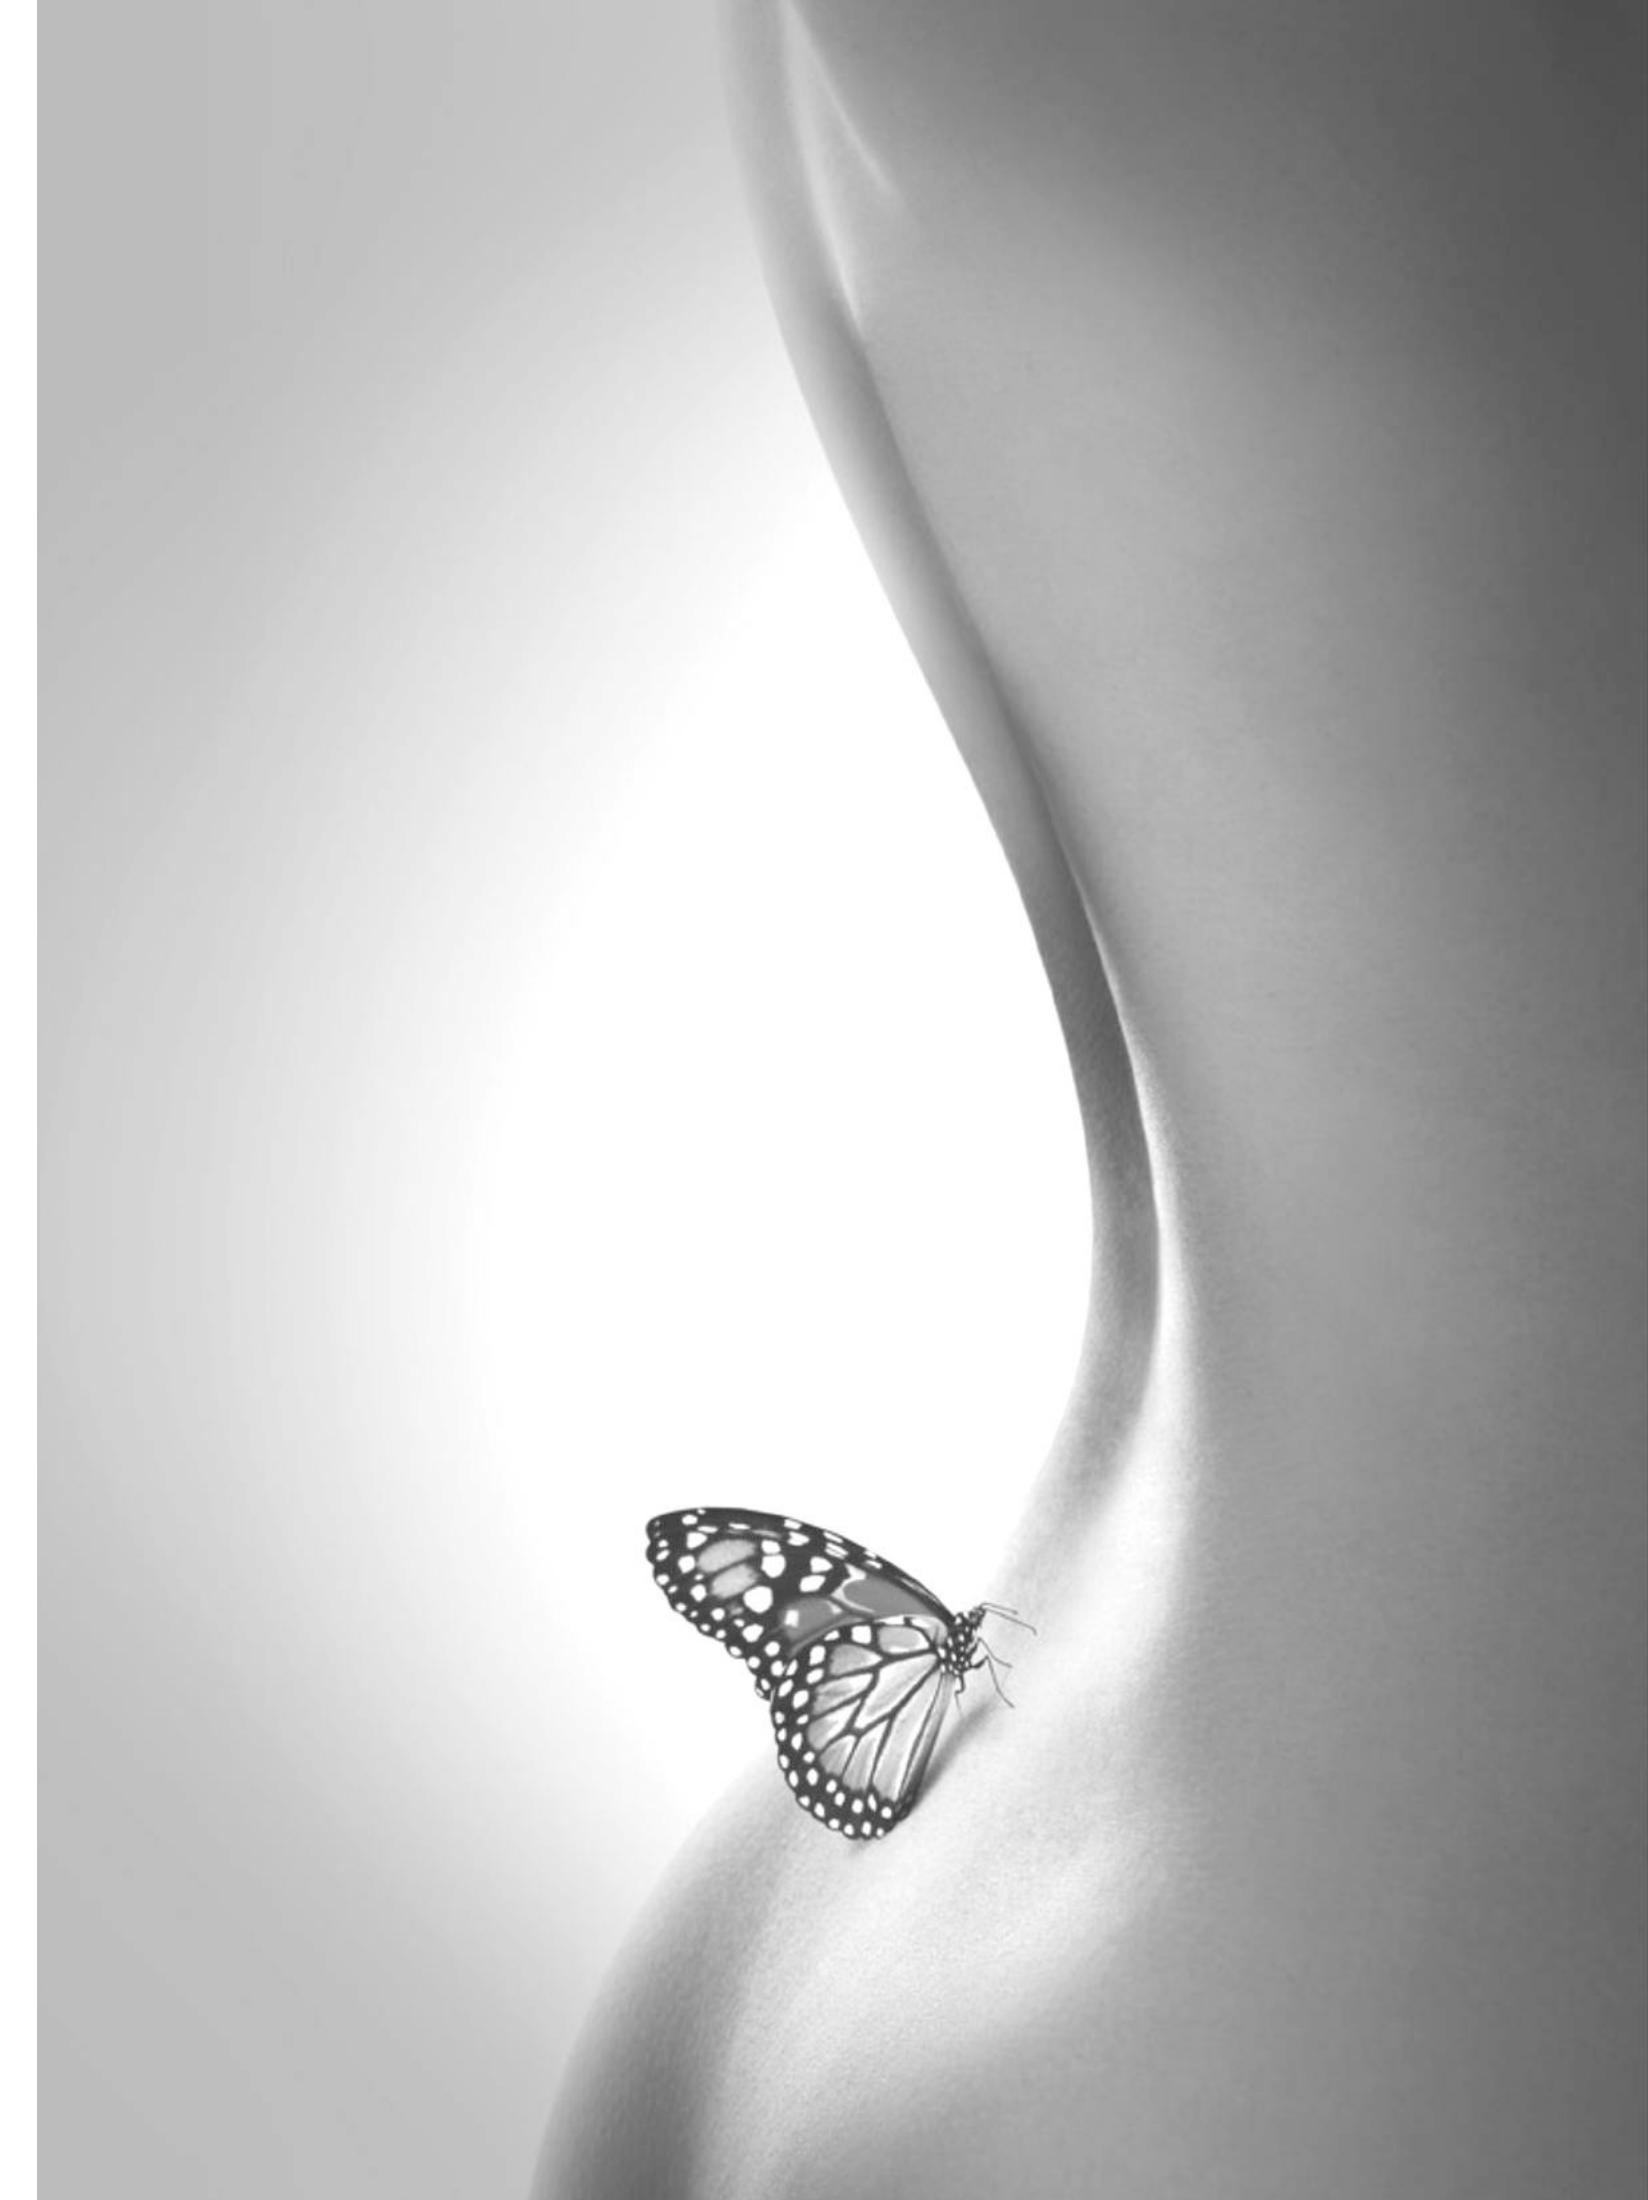

All inspiration comes from natrual beauty in life.

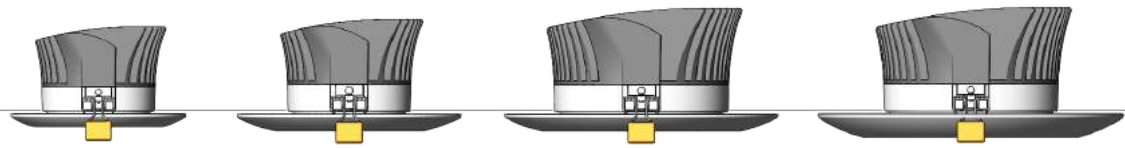

All inspiration comes from natural beauty in life.



All inspiration comes from natural beauty in life.

01 U-T020/U-T021/U-T022/U-T023 Track Spotlight



02 U-D001 / U-D002 Spotlight




03 U-D003 Adjustable Spotlight



04 U-D024 / U-D025 / U-D026 / U-D007 Downlight



04 U-D024 / U-D025 / U-D026 / U-D007 Downlight

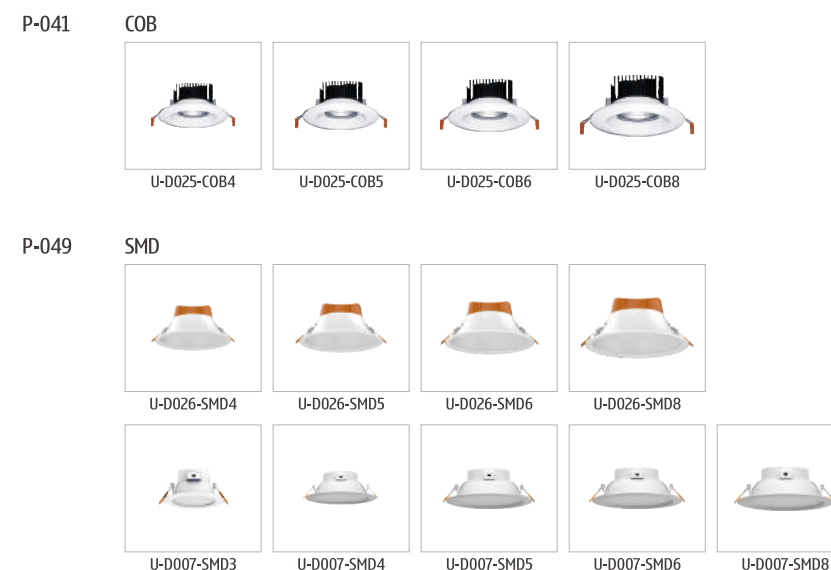

05 U-SD010 / U-SD011 / U-SD013 Surface mounted



06 GU10 / PAR20 / PAR30 / PAR38 Light Source





CREE  **LEDs**

Feature:

- Track Luminaires LED Downlight
- Heatsink adopt high purity aluminum material, give optimal passive heat dissipation of the LED ARRAY. Increase Led lifespan and light efficiency.
- Suitable for Hotels, Museum, Shopping Mall.

Models:
U-T020-COB4-30W U-T020-COB4T-30W U-T020-COB5-40W U-T020-COB5T-40W
U-T021-COB4-30W U-T021-COB4T-30W U-T021-COB5-40W U-T021-COB5T-40W
Wattage: 30W-40W
Lumen: 2250Lm-3200Lm



Feature:

- Track Luminaires LED Downlight
- Suitable LED Chip: Lighting fixture is suitable for COB LED Chip.
The structure parts are designed base on CREE, Bridgelux, Cree COB LED Chip.
- Material: The material of Heatsink, reflector, front ring is high purity aluminium.
Heatsink and front ring are connected by rotation way.
- Appearance and structure are patented. Easy installation can save much labor cost.
- Beam angle: 24/40/60°

Application:


- Home furnishing ,Boutique Traders Hotl, bazaar brand chain stores and other indoor lighting area

U-T020-COB Track Spotlight



Housing: Die-cast aluminum
Reflector: >85%


U-T020-COB4 Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2400lm
SIZE: 480X480X510mm
CTN: 27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T020-COB4-30W-30	2400Lm	30W	100-240V	24/40/60°	3000K	80	CREE
U-T020-COB4-30W-40	2400Lm	30W	100-240V	24/40/60°	4000K	80	CREE
U-T020-COB4-30W-60	2400Lm	30W	100-240V	24/40/60°	6000K	80	CREE

U-T020-COB4-30W-30

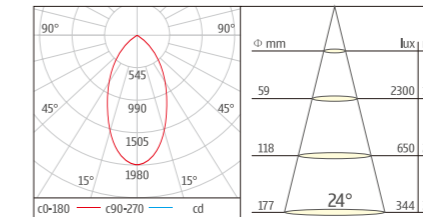

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee




Housing: Die-cast aluminum
Reflector: >85%

U-T020-COB4T Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2250lm
SIZE: 480X480X510mm
CTN: 27PCS

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T020-COB4T-30W-30	2250Lm	30W	100-240V	15/24°	3000K	80	CREE
U-T020-COB4T-30W-40	2250Lm	30W	100-240V	15/24°	4000K	80	CREE
U-T020-COB4T-30W-60	2250Lm	30W	100-240V	15/24°	6000K	80	CREE

U-T020-COB4T-30W-30

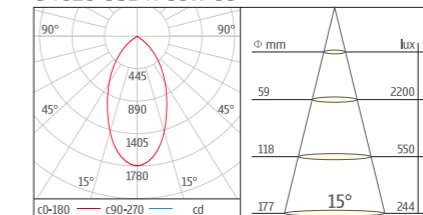


Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

U-T020-COB Track Spotlight



Housing: Die-cast aluminum
Reflector: >85%

U-T020-COB5 Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 3200lm
SIZE: 480X480X510mm
CTN: 27PCS




CREE LEDs

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T020-COB5-40W-30	3200Lm	40W	100-240V	24/40/60°	3000K	80	CREE
U-T020-COB5-40W-40	3200Lm	40W	100-240V	24/40/60°	4000K	80	CREE
U-T020-COB5-40W-60	3200Lm	40W	100-240V	24/40/60°	6000K	80	CREE

U-T020-COB5-40W-30

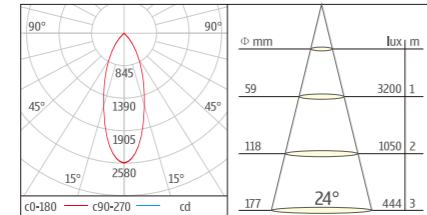

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee



Housing: Die-cast aluminum
Reflector: >85%


U-T020-COB5T Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2950lm
SIZE: 480X480X510mm
CTN: 27PCS

CREE LEDs

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T020-COB5T-40W-30	2950Lm	40W	100-240V	10/24°	3000K	80	CREE
U-T020-COB5T-40W-40	2950Lm	40W	100-240V	10/24°	4000K	80	CREE
U-T020-COB5T-40W-60	2950Lm	40W	100-240V	10/24°	6000K	80	CREE

U-T020-COB5T-40W-30

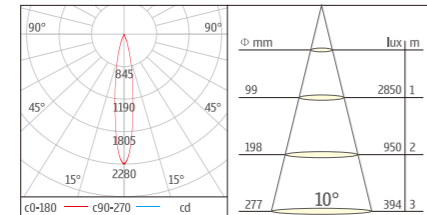

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee





Feature:

- Track Luminaires LED Downlight
- Suitable LED Chip: Lighting fixture is suitable for COB LED Chip.
The structure parts are designed base on CREE, Bridgelux, Cree COB LED Chip.
- Material: The material of Heatsink, reflector, front ring is high purity aluminium.
Heatsink and front ring are connected by rotation way.
- Appearance and structure are patented. Easy installation can save much labor cost.
- Beam angle: 24/40/60°

Application:


- Home furnishing ,Boutique Traders Hotl, bazaar brand chain stores and other indoor lighting area

U-T021-COB Track Spotlight



Housing: Die-cast aluminum
Reflector: >85%


U-T021-COB4 Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2400lm
SIZE: 480X480X510mm
CTN: 27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T021-COB4-30W-30	2400Lm	30W	100-240V	24/40/60°	3000K	80	CREE
U-T021-COB4-30W-40	2400Lm	30W	100-240V	24/40/60°	4000K	80	CREE
U-T021-COB4-30W-60	2400Lm	30W	100-240V	24/40/60°	6000K	80	CREE

U-T021-COB4-30W-30

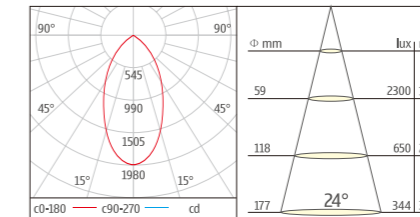

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee




Housing: Die-cast aluminum
Reflector: >85%

U-T021-COB4T Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2250lm
SIZE: 480X480X510mm
CTN: 27PCS

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T021-COB4T-30W-30	2250Lm	30W	100-240V	15/24°	3000K	80	CREE
U-T021-COB4T-30W-40	2250Lm	30W	100-240V	15/24°	4000K	80	CREE
U-T021-COB4T-30W-60	2250Lm	30W	100-240V	15/24°	6000K	80	CREE

U-T021-COB4T-30W-30

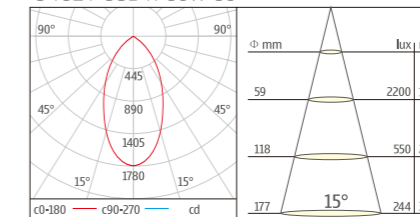


Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

U-T021-COB Track Spotlight



Housing: Die-cast aluminum
Reflector: >85%

U-T021-COB5 Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 3200lm
SIZE: 480X480X510mm
CTN: 27PCS




CREE LEDs

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T021-COB5-40W-30	3200Lm	40W	100-240V	24/40/60°	3000K	80	CREE
U-T021-COB5-40W-40	3200Lm	40W	100-240V	24/40/60°	4000K	80	CREE
U-T021-COB5-40W-60	3200Lm	40W	100-240V	24/40/60°	6000K	80	CREE

U-T021-COB5-40W-30

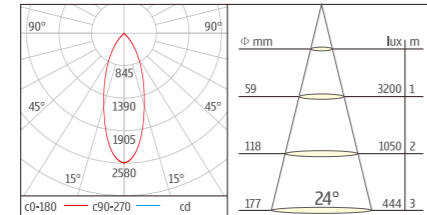

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee



Housing: Die-cast aluminum
Reflector: >85%


U-T021-COB5T Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2950lm
SIZE: 480X480X510mm
CTN: 27PCS

CREE LEDs


STANDARD MODEL



ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T021-COB5T-40W-30	2950Lm	40W	100-240V	10/24°	3000K	80	CREE
U-T021-COB5T-40W-40	2950Lm	40W	100-240V	10/24°	4000K	80	CREE
U-T021-COB5T-40W-60	2950Lm	40W	100-240V	10/24°	6000K	80	CREE

U-T021-COB5T-40W-30

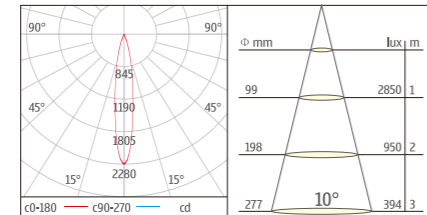

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

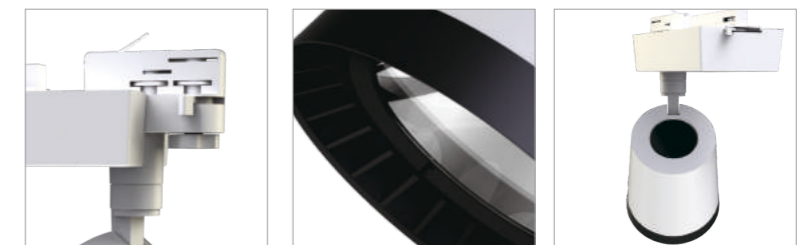

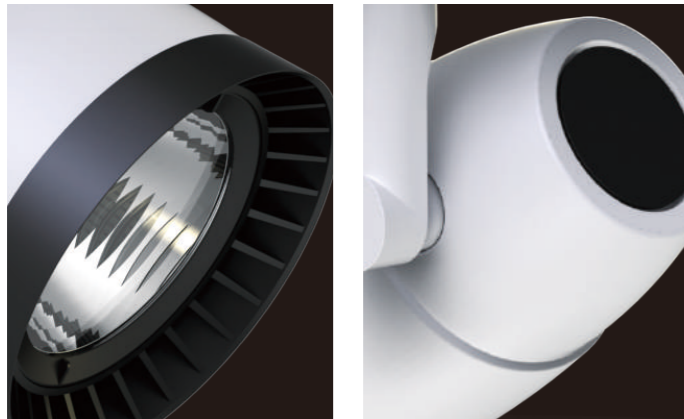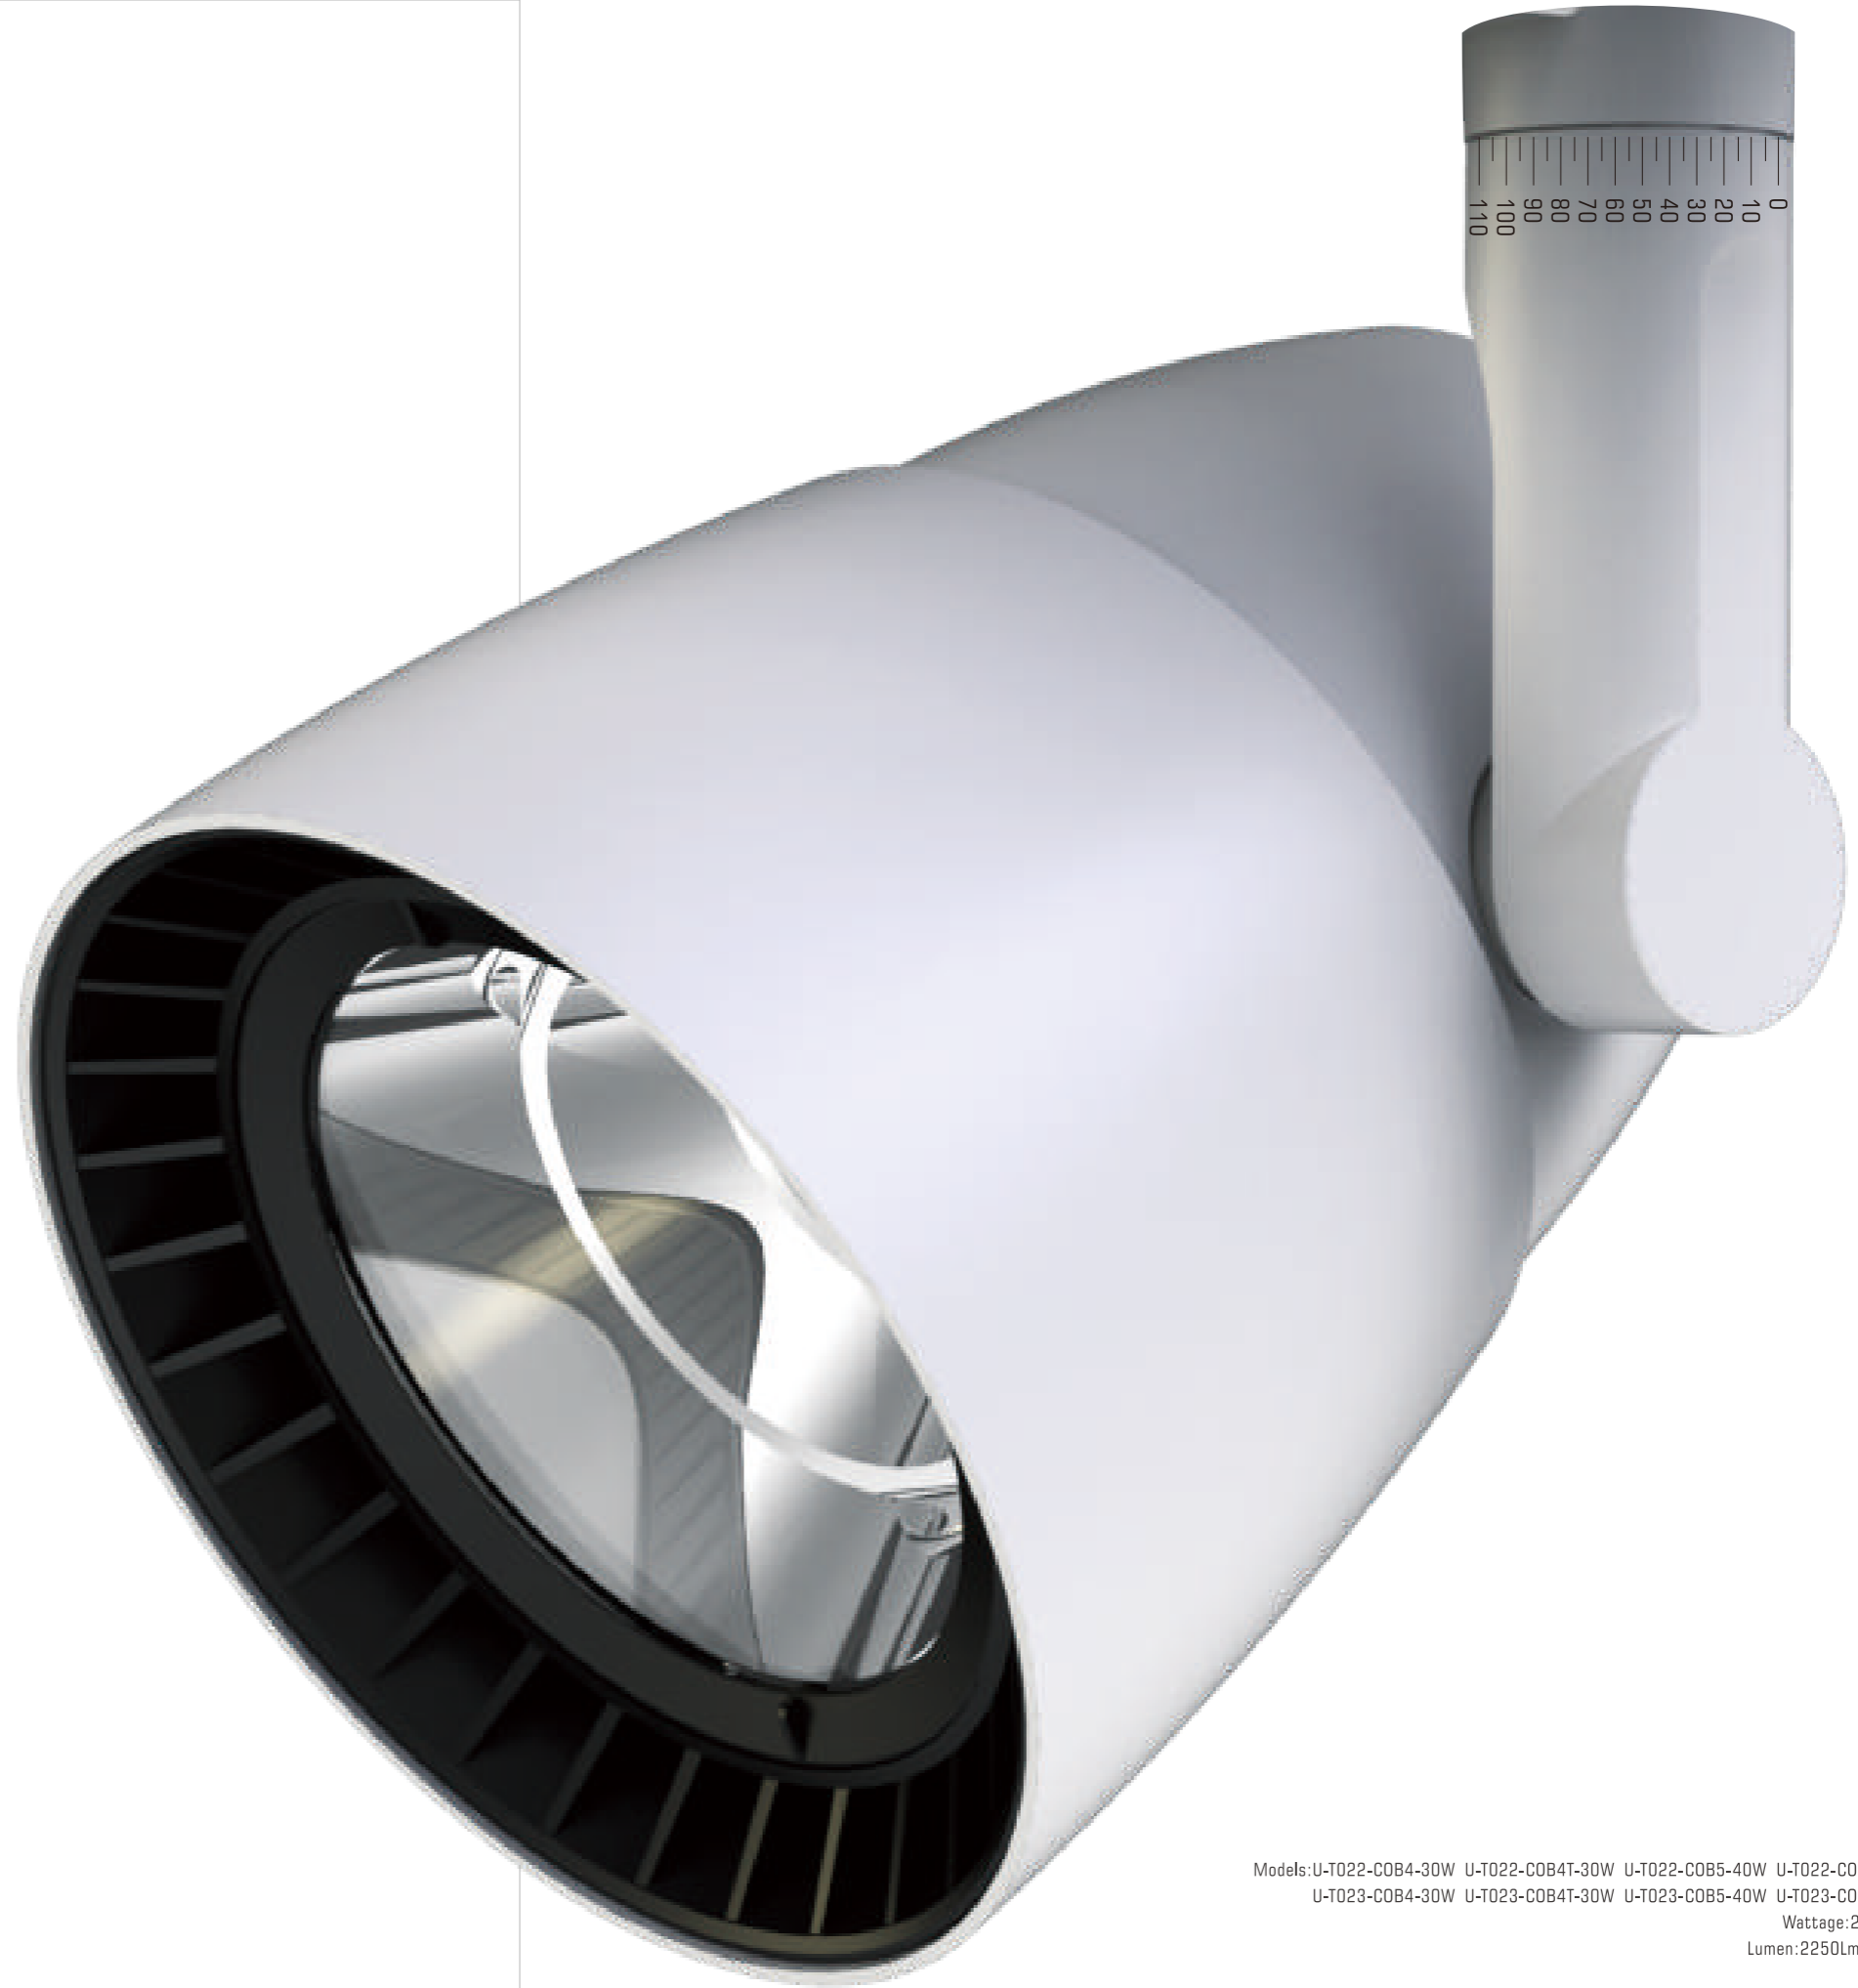

CREE  **LEDs** 

Feature:

- Track Luminaires LED Downlight
- Heatsink adopt high purity aluminum material, give optimal passive heat dissipation of the LED ARRAY. Increase Led lifespan and light efficiency.
- Suitable for Hotels, Museum, Shopping Mall.

Models: U-T022-COB4-30W U-T022-COB4T-30W U-T022-COB5-40W U-T022-COB5T-40W
U-T023-COB4-30W U-T023-COB4T-30W U-T023-COB5-40W U-T023-COB5T-40W
Wattage: 25W-40W
Lumen: 2250lm-3200lm



Feature:

- Track Luminaires LED Downlight
- Suitable LED Chip: Lighting fixture is suitable for COB LED Chip.
The structure parts are designed base on CREE, Bridgelux, Cree COB LED Chip.
- Material: The material of Heatsink, reflector, front ring is high purity aluminium.
Heatsink and front ring are connected by rotation way.
- Appearance and structure are patented. Easy installation can save much labor cost.
- Beam angle: 24/40/60°

Application:


- Home furnishing ,Boutique Traders Hotl, bazaar brand chain stores and other indoor lighting area

U-T022-COB Track Spotlight



Housing: Die-cast aluminum
Reflector: >85%


U-T022-COB4 Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2400lm
SIZE: 480X480X510mm
CTN: 27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T022-COB4-30W-30	2400Lm	30W	100-240V	24/40/60°	3000K	80	CREE
U-T022-COB4-30W-40	2400Lm	30W	100-240V	24/40/60°	4000K	80	CREE
U-T022-COB4-30W-60	2400Lm	30W	100-240V	24/40/60°	6000K	80	CREE

U-T022-COB4-30W-30

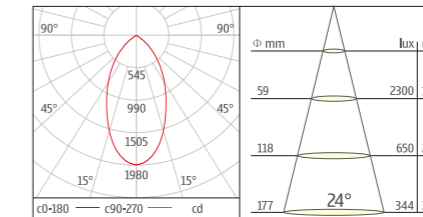

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee




Housing: Die-cast aluminum
Reflector: >85%

U-T022-COB4T Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2250lm
SIZE: 480X480X510mm
CTN: 27PCS

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T022-COB4T-30W-30	2250Lm	30W	100-240V	15/24°	3000K	80	CREE
U-T022-COB4T-30W-40	2250Lm	30W	100-240V	15/24°	4000K	80	CREE
U-T022-COB4T-30W-60	2250Lm	30W	100-240V	15/24°	6000K	80	CREE

U-T022-COB4T-30W-30

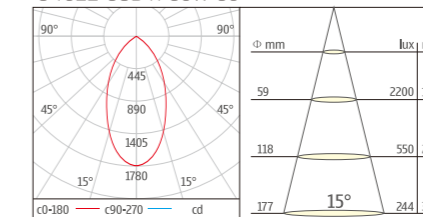


Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

U-T022-COB Track Spotlight



Housing: Die-cast aluminum
Reflector: >85%


U-T022-COB5 Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 3200lm
SIZE: 480X480X510mm
CTN: 27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T022-COB5-40W-30	3200Lm	40W	100-240V	24/40/60°	3000K	80	CREE
U-T022-COB5-40W-40	3200Lm	40W	100-240V	24/40/60°	4000K	80	CREE
U-T022-COB5-40W-60	3200Lm	40W	100-240V	24/40/60°	6000K	80	CREE

U-T022-COB5-40W-30

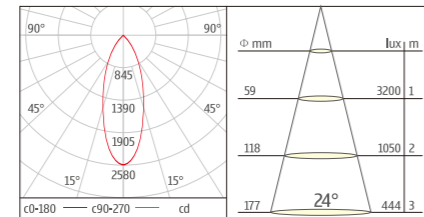

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee




Housing: Die-cast aluminum
Reflector: >85%

U-T022-COB5T Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2950lm
SIZE: 480X480X510mm
CTN: 27PCS

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T022-COB5T-40W-30	2950Lm	40W	100-240V	10/24°	3000K	80	CREE
U-T022-COB5T-40W-40	2950Lm	40W	100-240V	10/24°	4000K	80	CREE
U-T022-COB5T-40W-60	2950Lm	40W	100-240V	10/24°	6000K	80	CREE

U-T022-COB5T-40W-30

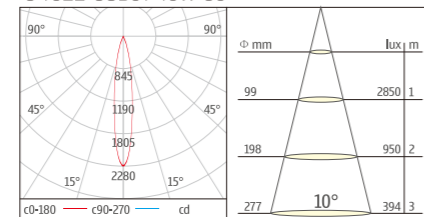

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee





Feature:

- Track Luminaires LED Downlight
- Suitable LED Chip: Lighting fixture is suitable for COB LED Chip.
The structure parts are designed base on CREE, Bridgelux, Cree COB LED Chip.
- Material: The material of Heatsink, reflector, front ring is high purity aluminium.
Heatsink and front ring are connected by rotation way.
- Appearance and structure are patented. Easy installation can save much labor cost.
- Beam angle: 15/24/38/60°

Application:


- Home furnishing ,Boutique Traders Hotl, bazaar brand chain stores and other indoor lighting area

U-T023-COB Track Spotlight



Housing: Die-cast aluminum
Reflector: >85%


U-T023-COB4 Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2400lm
SIZE: 480X480X510mm
CTN: 27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T023-COB4-30W-30	2400Lm	30W	100-240V	24/40/60°	3000K	80	CREE
U-T023-COB4-30W-40	2400Lm	30W	100-240V	24/40/60°	4000K	80	CREE
U-T023-COB4-30W-60	2400Lm	30W	100-240V	24/40/60°	6000K	80	CREE

U-T023-COB4-30W-30

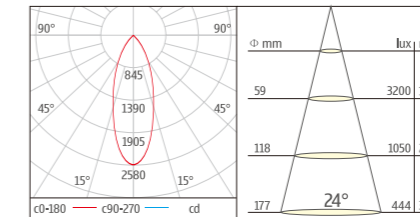

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee




Housing: Die-cast aluminum
Reflector: >85%

U-T023-COB4T Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2250lm
SIZE: 480X480X510mm
CTN: 27PCS

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T023-COB4T-30W-30	2250Lm	30W	100-240V	15/24°	3000K	80	CREE
U-T023-COB4T-30W-40	2250Lm	30W	100-240V	15/24°	4000K	80	CREE
U-T023-COB4T-30W-60	2250Lm	30W	100-240V	15/24°	6000K	80	CREE

U-T023-COB4T-30W-30

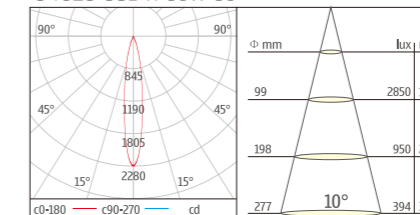


Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

U-T023-COB Track Spotlight



Housing: Die-cast aluminum
Reflector: >85%

U-T023-COB5 Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 3200lm
SIZE: 480X480X510mm
CTN: 27PCS




CREE LEDs

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T023-COB5-40W-30	3200Lm	40W	100-240V	24/40/60°	3000K	80	CREE
U-T023-COB5-40W-40	3200Lm	40W	100-240V	24/40/60°	4000K	80	CREE
U-T023-COB5-40W-60	3200Lm	40W	100-240V	24/40/60°	6000K	80	CREE

U-T023-COB5-40W-30

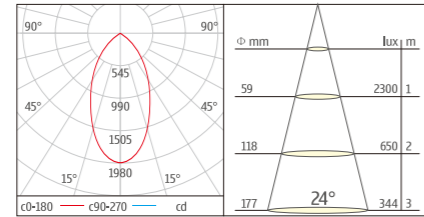

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee



Housing: Die-cast aluminum
Reflector: >85%


U-T023-COB5T Track Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2950lm
SIZE: 480X480X510mm
CTN: 27PCS

CREE LEDs

STANDARD MODEL


ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-T023-COB5T-40W-30	2950Lm	40W	100-240V	10/24°	3000K	80	CREE
U-T023-COB5T-40W-40	2950Lm	40W	100-240V	10/24°	4000K	80	CREE
U-T023-COB5T-40W-60	2950Lm	40W	100-240V	10/24°	6000K	80	CREE

U-T023-COB5T-40W-30

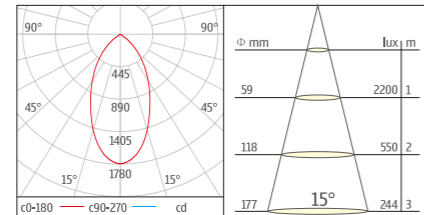


Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee



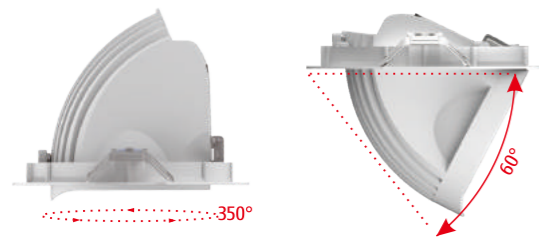

CREE LEDs


Made of high quality die-casting aluminum, unique cooling system design. Higher power at average size. This model can use fan and increase wattage. Reflector optic outstanding design make light reflector reflectivity reach more than 85%.
 Smart design for recessed mounting, easy replacement. Vertical 60° adjustment and 350° rotation. Ball structure design make position fix more easier, smooth and strong.
 Suitable for Hotels. Museum. Shopping Mall.



Put the frame inside



Put the body in to frame according to the steps photos showed

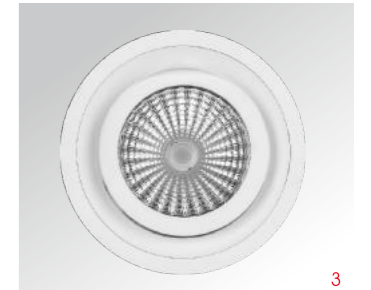

Accomplishment



Loose the spring with flat screwdriver and take out the ring.




Press down the spring to fix the frame

U-D001-COB Spotlight



Housing: Die-cast aluminum
Reflector: >85%

U-D001-COB4 Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1600lm
SIZE: L540xW540xH540mm
CTN:27PCS



Feature:

- Size: 4"/6"
- Wattage: 25W/35W
- Cut-out: Φ140 Φ175
- Horizontal: 350° rotation, Vertical : 60° adjustable.
- Ball vertical adjustment, product get appearance and structure patented.

Application:


- Home furnishing ,Boutique Traders Hotl,bazaar brand chain stores and other indoor lighting area

STANDARD MODEL




ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D001-COB4-20W-30	1600Lm	20W	100-240V	24/35°	3000K	80	CREE
U-D001-COB4-20W-40	1600Lm	20W	100-240V	24/35°	4000K	80	CREE
U-D001-COB4-20W-60	1600Lm	20W	100-240V	24/35°	6000K	80	CREE
U-D001-COB4-25W-30	2000Lm	25W	100-240V	24/35°	3000K	80	CREE
U-D001-COB4-25W-40	2000Lm	25W	100-240V	24/35°	4000K	80	CREE
U-D001-COB4-25W-60	2000Lm	25W	100-240V	24/35°	6000K	80	CREE

U-D001-COB4-20W-30

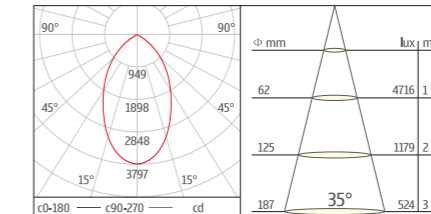

U-D001-COB4-25W-30

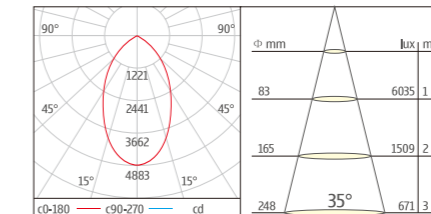

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee


U-D001-COB Spotlight

IP20 High efficiency Alum-Mirror F CE 350° 60°



Housing: Die-cast aluminum
Reflector: >85%

U-D001-COB6 Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2400lm
SIZE: L450xW450xH590 mm
CTN: 12PCS




STANDARD MODEL


CREE LEDs

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D001-COB6-30W-30	2400Lm	30W	100-240V	24/45°	3000K	80	CREE
U-D001-COB6-30W-40	2400Lm	30W	100-240V	24/45°	4000K	80	CREE
U-D001-COB6-30W-60	2400Lm	30W	100-240V	24/45°	6000K	80	CREE
U-D001-COB6-35W-30	2800Lm	35W	100-240V	24/45°	3000K	80	CREE
U-D001-COB6-35W-40	2800Lm	35W	100-240V	24/45°	4000K	80	CREE
U-D001-COB6-35W-60	2800Lm	35W	100-240V	24/45°	6000K	80	CREE

U-D001-COB6-30W-30

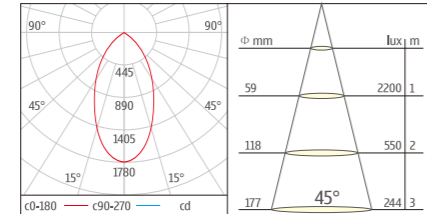

U-D001-COB6-35W-30

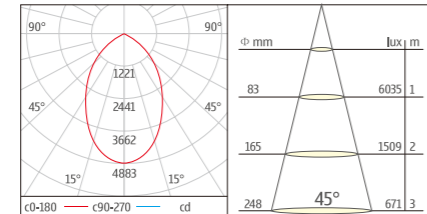

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee





Feature:

- Size: 4"/6"
- Wattage: 15W/30W
- Cut-out: 90x90 135x135
- Vertical : 60° adjustable.
- Ball vertical adjustment, product get appearance and structure patented.

Application:


- Home furnishing ,Boutique Traders Hotl,bazzar brand chain stores and other indoor lighting area

U-D002-COB Spotlight



Housing: Die-cast aluminum
Reflector: >85%

U-D002-COB4 Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1600lm
SIZE: 480X480X510mm
CTN: 27PCS




STANDARD MODEL




ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D002-COB4-10W-30	750Lm	10W	100-240V	45°	3000K	80	CREE
U-D002-COB4-10W-40	750Lm	10W	100-240V	45°	4000K	80	CREE
U-D002-COB4-10W-60	750Lm	10W	100-240V	45°	6000K	80	CREE
U-D002-COB4-15W-30	1100Lm	15W	100-240V	45°	3000K	80	CREE
U-D002-COB4-15W-40	1100Lm	15W	100-240V	45°	4000K	80	CREE
U-D002-COB4-15W-60	1100Lm	15W	100-240V	45°	6000K	80	CREE

U-D002-COB4-10W-30

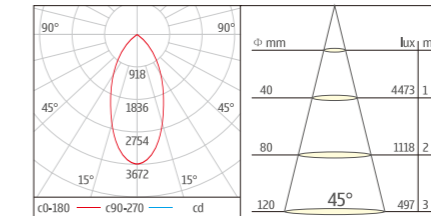

U-D002-COB4-15W-30

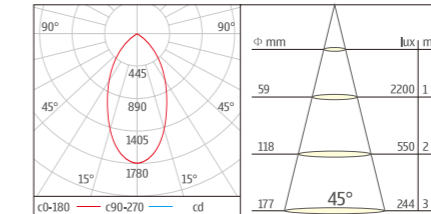

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee


U-D002-COB Spotlight

IP20 High efficiency Alum-Mirror F CE 60°



Housing: Die-cast aluminum
Reflector: >85%

U-D002-COB6 Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output:2400lm
SIZE: 550X550X550mm
CTN:27PCS




STANDARD MODEL




ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D002-COB6-30W-30	2200Lm	30W	100-240V	45°	3000K	80	CREE
U-D002-COB6-30W-40	2200Lm	30W	100-240V	45°	4000K	80	CREE
U-D002-COB6-30W-60	2200Lm	30W	100-240V	45°	6000K	80	CREE
U-D002-COB6-35W-30	2550Lm	35W	100-240V	45°	3000K	80	CREE
U-D002-COB6-35W-40	2550Lm	35W	100-240V	45°	4000K	80	CREE
U-D002-COB6-35W-60	2550Lm	35W	100-240V	45°	6000K	80	CREE


U-D002-COB6-30W-30


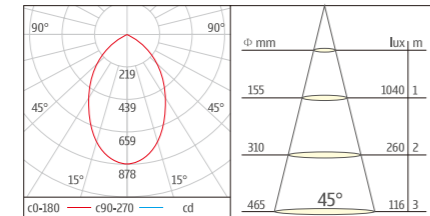


U-D002-COB6-35W-30

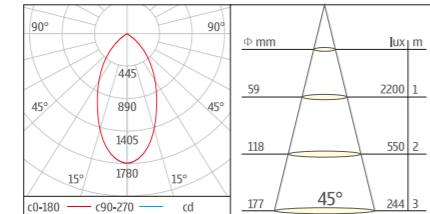

Efficiency:80 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee

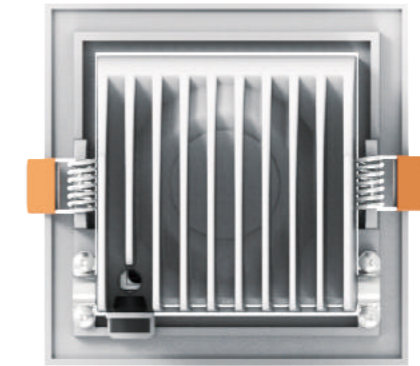

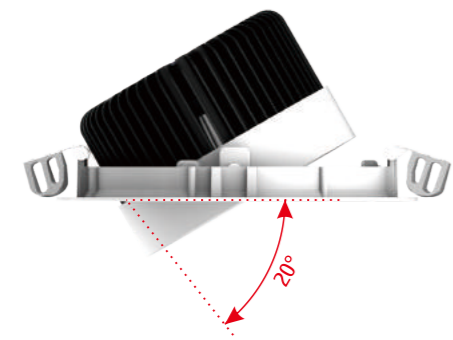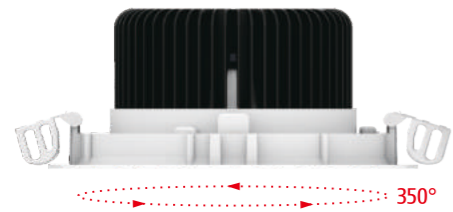

CREE LEDs


Made of high quality die-casting aluminum,unique cooling system design. Higher power at average size.This model can use fan and increase wattage. Reflector optic outstanding design make light reflector reflectivity reach more than 85%. Smart design for recessed mounting ,easy replacement.Vertical 60° adjustment and 350° rotation.Ball structure design make position fix more easier, smooth and strong. Suitable for Hotels,Museum,Shopping Mall.



1-1 Loose the spring with flat screwdriver and take out the ring.



1-2 Press down the spring to fix the frame

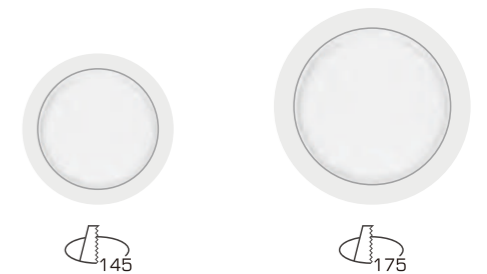

Models:U-D003-COB4 U-D003-COB6
Wattage:20W-35W
Lumen:1600Lm-2800Lm



Feature:

- Size: 4 1/6"
- Wattage: 25W/35W
- Cut-out: $\Phi 140$ $\Phi 175$
- Horizontal: 350° rotation, Vertical : 60° adjustable.
- Ball vertical adjustment, product get appearance and structure patented.

Application:

- Home furnishing ,Boutique Traders Hotl,bazaar brand chain stores and other indoor lighting area


U-D003-COB Spotlight



Housing: Die-cast aluminum
Reflector: >85%

U-D003-COB4 Spotlight Series

With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1600lm
SIZE: 480X480X510mm
CTN: 27PCS




STANDARD MODEL




ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D003-COB4-20W-30	1600Lm	20W	100-240V	24/35°	3000K	80	CREE
U-D003-COB4-20W-40	1600Lm	20W	100-240V	24/35°	4000K	80	CREE
U-D003-COB4-20W-60	1600Lm	20W	100-240V	24/35°	6000K	80	CREE
U-D003-COB4-25W-30	2000Lm	25W	100-240V	24/35°	3000K	80	CREE
U-D003-COB4-25W-40	2000Lm	25W	100-240V	24/35°	4000K	80	CREE
U-D003-COB4-25W-60	2000Lm	25W	100-240V	24/35°	6000K	80	CREE

U-D003-COB4-20W-30

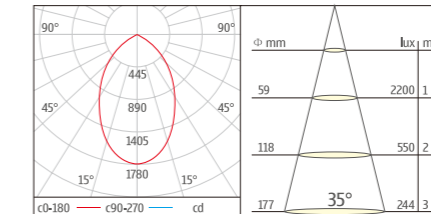

U-D003-COB4-25W-30

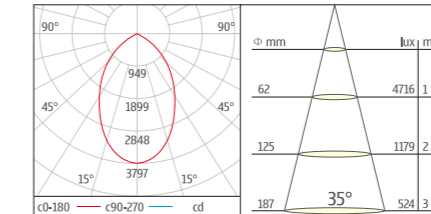

Efficiency: 70 Lm/W
Life time: 30.000 hours (70% Lumen maintenance)
3 Years Guarantee


U-D003-COB Spotlight

IP20 High efficiency Alum-Mirror F CE 350° 20°



Housing: Die-cast aluminum
Reflector: >85%

U-D003-COB6 Spotlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output:2400lm
SIZE: 550X550X550mm
CTN:27PCS




STANDARD MODEL




ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D003-COB6-30W-30	2400Lm	30W	100-240V	24/45°	3000K	80	CREE
U-D003-COB6-30W-40	2400Lm	30W	100-240V	24/45°	4000K	80	CREE
U-D003-COB6-30W-60	2400Lm	30W	100-240V	24/45°	6000K	80	CREE
U-D003-COB6-35W-30	2800Lm	35W	100-240V	24/45°	3000K	80	CREE
U-D003-COB6-35W-40	2800Lm	35W	100-240V	24/45°	4000K	80	CREE
U-D003-COB6-35W-60	2800Lm	35W	100-240V	24/45°	6000K	80	CREE


U-D003-COB6-30W-30

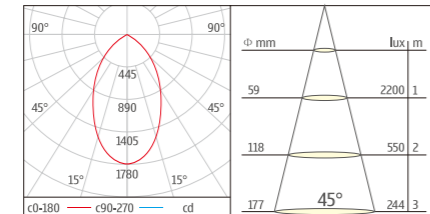

U-D003-COB6-35W-30

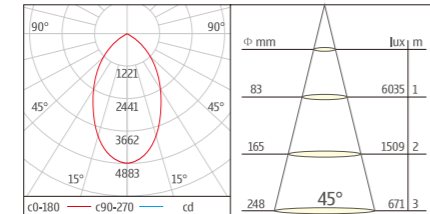

Efficiency:80 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee


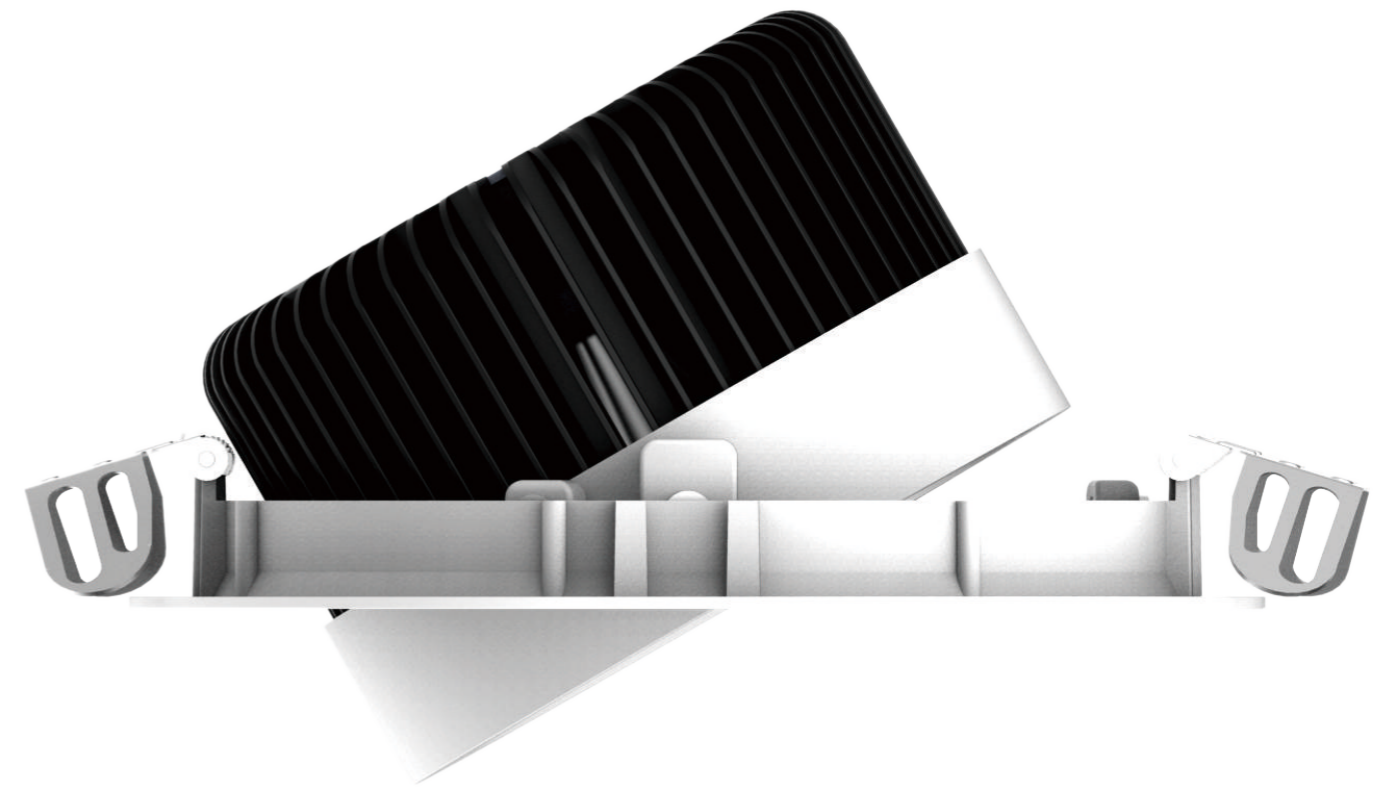




CREE LEDs

Feature:


- Products adopt deep anti-glare design, solved traditional glare eyes problem.
- Heatsink adopt high purity aluminum material, give optimal passive heat dissipation of the LED ARRAY. Increase Led lifespan and light efficiency.
- Suitable for Hotels, Museum, Shopping Mall.

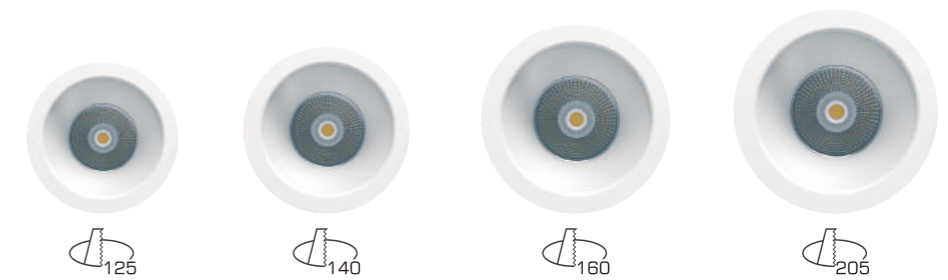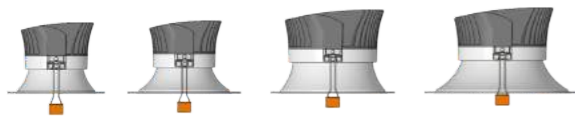

Models: U-D024-COB4 U-D024-COB5 U-D024-COB6 U-D024-COB8
 Wattage: 15W-40W
 Lumen: 1200Lm-3200Lm


U-D024-COB Downlight

IP54 High efficiency Alumi-Mirror F CE UGR <19

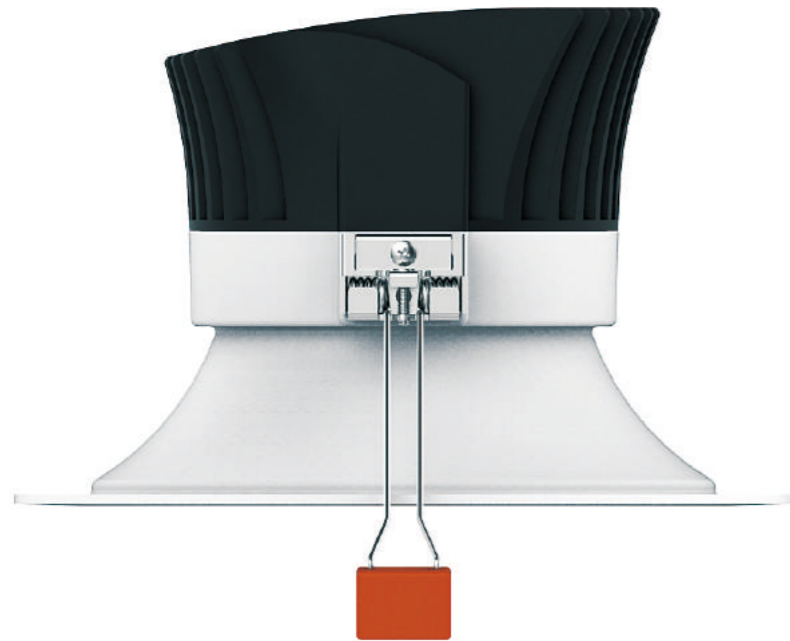

Housing: Die-cast aluminum
Reflector: >85%

U-D024-COB4 Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1600lm
SIZE: L450xW450xH500mm
CTN:27PCS



Feature:

- The lighting fixture are anti-glare design.
- Suitable LED Chip: Lighting fixture is suitable for COB LED Chip.
The structure parts are designed base on CREE, Bridgelux, Cree COB LED Chip.
- Material: The material of Heatsink, reflector, front ring is high purity aluminium.
Heatsink and front ring are connected by rotation way.
- Appearance and structure are patented. Easy installation can save much labor cost.
- Beam angle: 50°

Application:


- Home furnishing ,Boutique Traders Hotl, bazaar brand chain stores and other indoor lighting area

STANDARD MODEL




ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D024-COB4-15W-30	1200Lm	15W	100-240V	50°	3000K	80	CREE
U-D024-COB4-15W-40	1200Lm	15W	100-240V	50°	4000K	80	CREE
U-D024-COB4-15W-60	1200Lm	15W	100-240V	50°	6000K	80	CREE
U-D024-COB4-20W-30	1600Lm	20W	100-240V	50°	3000K	80	CREE
U-D024-COB4-20W-40	1600Lm	20W	100-240V	50°	4000K	80	CREE
U-D024-COB4-20W-60	1600Lm	20W	100-240V	50°	6000K	80	CREE

U-D024-COB4-15W-30

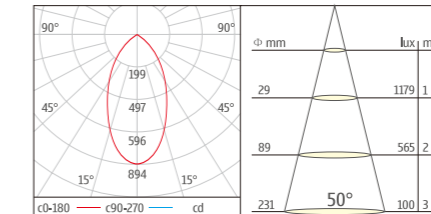

U-D024-COB4-20W-30

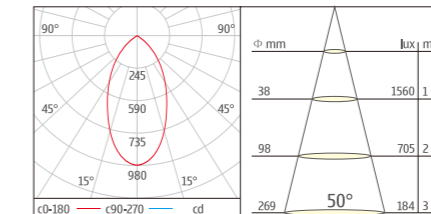

Efficiency: 70 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee


U-D024-COB Downlight

IP54 High efficiency Alum-Mirror F CE UGR <19




Housing: Die-cast aluminum Reflector: >85%

U-D024-COB5 Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output:2000lm
SIZE: L540xW540xH540mm
CTN:27PCS




STANDARD MODEL		CREE LEDs						
ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand	
U-D024-COB5-20W-30	1600Lm	20W	100-240V	50°	3000K	80	CREE	
U-D024-COB5-20W-40	1600Lm	20W	100-240V	50°	4000K	80	CREE	
U-D024-COB5-20W-60	1600Lm	20W	100-240V	50°	6000K	80	CREE	
U-D024-COB5-25W-30	2000Lm	25W	100-240V	50°	3000K	80	CREE	
U-D024-COB5-25W-40	2000Lm	25W	100-240V	50°	4000K	80	CREE	
U-D024-COB5-25W-60	2000Lm	25W	100-240V	50°	6000K	80	CREE	

U-D024-COB5-20W-30

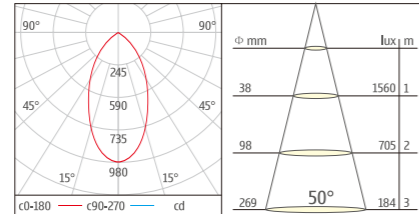

U-D024-COB5-25W-30

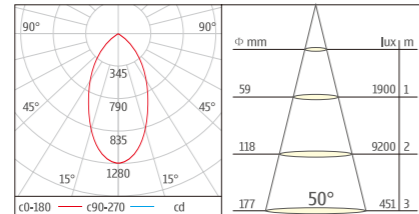

Efficiency:80 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee


U-D024-COB Downlight

IP54 High efficiency Alum-Mirror F CE UGR <19




Housing: Die-cast aluminum Reflector: >85%

U-D024-COB6 Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output:2400lm
SIZE: L540xW540xH540mm
CTN:27PCS




STANDARD MODEL		CREE LEDs						
ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand	
U-D024-COB6-25W-30	2400Lm	25W	100-240V	50°	3000K	80	CREE	
U-D024-COB6-25W-40	2400Lm	25W	100-240V	50°	4000K	80	CREE	
U-D024-COB6-25W-60	2400Lm	25W	100-240V	50°	6000K	80	CREE	
U-D024-COB6-30W-30	2800Lm	30W	100-240V	50°	3000K	80	CREE	
U-D024-COB6-30W-40	2800Lm	30W	100-240V	50°	4000K	80	CREE	
U-D024-COB6-30W-60	2800Lm	30W	100-240V	50°	6000K	80	CREE	

U-D024-COB6-25W-30

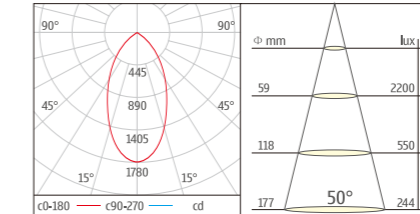

U-D024-COB6-30W-30

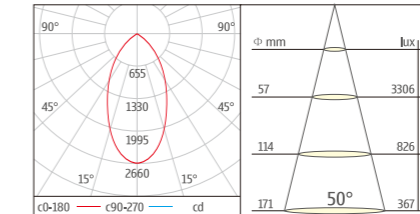

Efficiency:80 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee


U-D024-COB Downlight

IP54 High efficiency Alum-Mirror F CE UGR <19



Housing: Die-cast aluminum
Reflector: >85%

U-D024-COB8 Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 3200lm
SIZE: L450xW450xH590mm
CTN: 20PCS




STANDARD MODEL




ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D024-COB8-35W-30	2800Lm	35W	100-240V	50°	3000K	80	CREE
U-D024-COB8-35W-40	2800Lm	35W	100-240V	50°	4000K	80	CREE
U-D024-COB8-35W-60	2800Lm	35W	100-240V	50°	6000K	80	CREE
U-D024-COB8-40W-30	3200Lm	40W	100-240V	50°	3000K	80	CREE
U-D024-COB8-40W-40	3200Lm	40W	100-240V	50°	4000K	80	CREE
U-D024-COB8-40W-60	3200Lm	40W	100-240V	50°	6000K	80	CREE


U-D024-COB8-35W-30

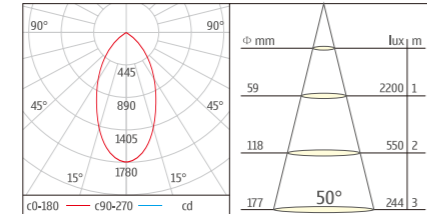

U-D024-COB8-40W-30

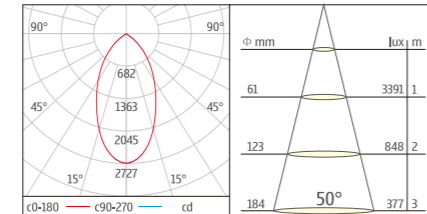

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

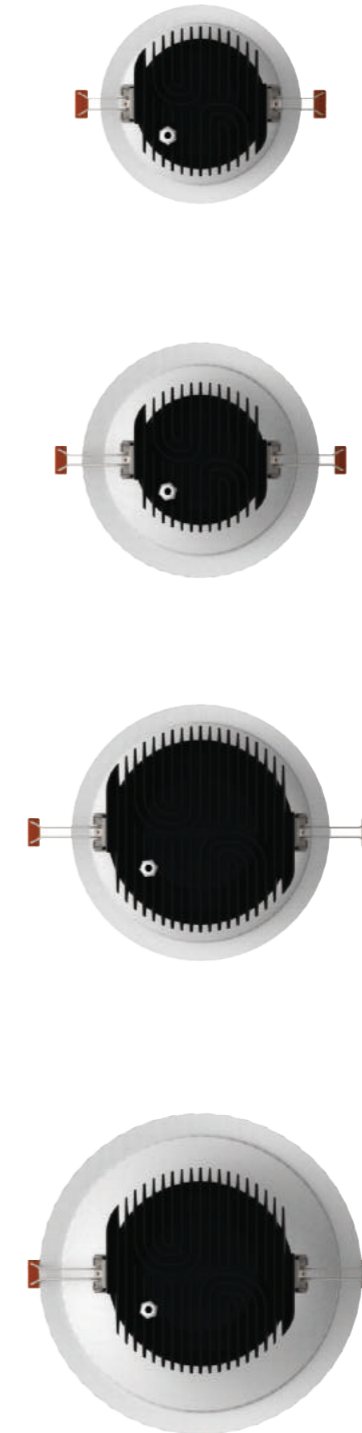




CREE LEDs

Feature:

- Products adopt deep anti-glare design, solved traditional glare eyes problem.
- Heatsink adopt high purity aluminum material, give optimal passive heat dissipation of the LED ARRAY. Increase Led lifespan and light efficiency.
- Suitable for Hotels. Museum. Shopping Mall.



Models: U-D025-C0B4 U-D025-C0B5 U-D025-C0B6 U-D025-C0B8
 Wattage: 15W-40W
 Lumen: 1200Lm-3200Lm

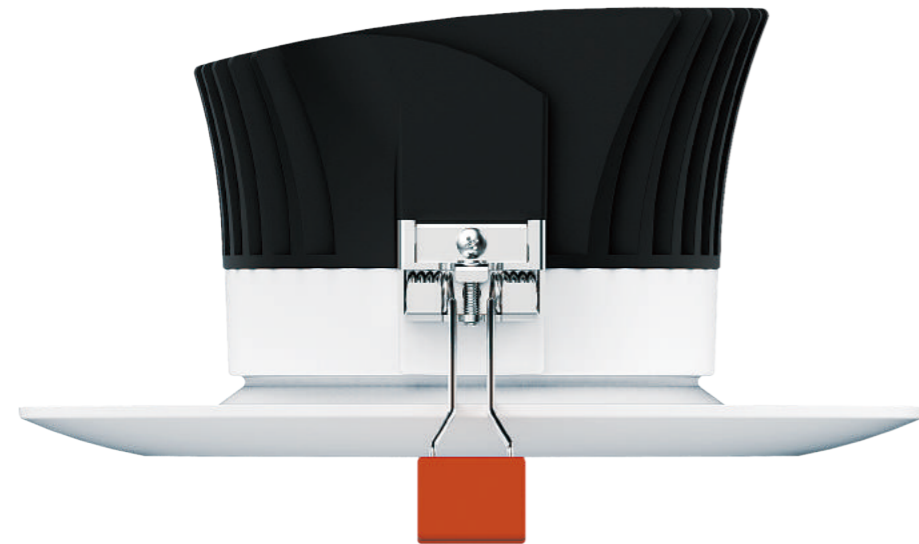

Feature:

- The lighting fixture are anti-glare design.
- Suitable LED Chip: Lighting fixture is suitable for COB LED Chip.
The structure parts are designed base on CREE, Bridgelux, Cree COB LED Chip.
- Material: The material of Heatsink, reflector, front ring is high purity aluminium.
Heatsink and front ring are connected by rotation way.
- Appearance and structure are patented. Easy installation can save much labor cost.
- Beam angle: 15°/27°/40°

Application:


- Home furnishing ,Boutique Traders Hotl, bazaar brand chain stores and other indoor lighting area

U-D025-COB Downlight



Housing: Die-cast aluminum
Reflector: >85%


U-D025-COB4 Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1600lm
SIZE: 480X480X510mm
CTN:27PCS




STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D025-COB4-15W-30	1200Lm	15W	100-240V	50°	3000K	80	CREE
U-D025-COB4-15W-40	1200Lm	15W	100-240V	50°	4000K	80	CREE
U-D025-COB4-15W-60	1200Lm	15W	100-240V	50°	6000K	80	CREE
U-D025-COB4-20W-30	1600Lm	20W	100-240V	50°	3000K	80	CREE
U-D025-COB4-20W-40	1600Lm	20W	100-240V	50°	4000K	80	CREE
U-D025-COB4-20W-60	1600Lm	20W	100-240V	50°	6000K	80	CREE

U-D025-COB4-15W-30

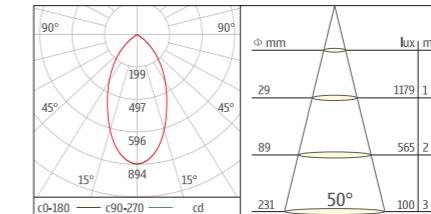

U-D025-COB4-20W-30

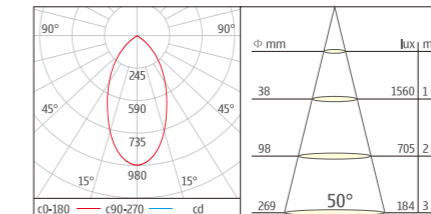

Efficiency: 70 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee


U-D025-COB Downlight

IP54 High efficiency Alum-Mirror F CE UGR <19




Housing: Die-cast aluminum
Reflector: >85%

U-D025-COB5 Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output:2000lm
SIZE: 550X550X550mm
CTN:27PCS




STANDARD MODEL								CREE LEDs
ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand	
U-D025-COB5-20W-30	1600Lm	20W	100-240V	50°	3000K	80	CREE	
U-D025-COB5-20W-40	1600Lm	20W	100-240V	50°	4000K	80	CREE	
U-D025-COB5-20W-60	1600Lm	20W	100-240V	50°	6000K	80	CREE	
U-D025-COB5-25W-30	2000Lm	25W	100-240V	50°	3000K	80	CREE	
U-D025-COB5-25W-40	2000Lm	25W	100-240V	50°	4000K	80	CREE	
U-D025-COB5-25W-60	2000Lm	25W	100-240V	50°	6000K	80	CREE	

U-D025-COB5-20W-30

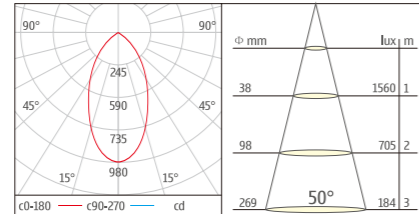

U-D025-COB5-25W-30

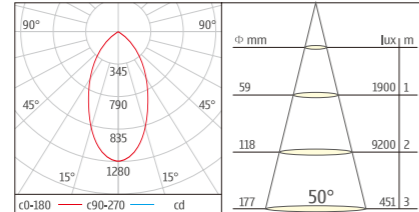

Efficiency:80 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee


U-D025-COB Downlight

IP54 High efficiency Alum-Mirror F CE UGR <19




Housing: Die-cast aluminum
Reflector: >85%

U-D025-COB6 Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output:2400lm
SIZE: 550X550X550mm
CTN:27PCS




STANDARD MODEL								CREE LEDs
ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand	
U-D025-COB6-25W-30	2400Lm	25W	100-240V	50°	3000K	80	CREE	
U-D025-COB6-25W-40	2400Lm	25W	100-240V	50°	4000K	80	CREE	
U-D025-COB6-25W-60	2400Lm	25W	100-240V	50°	6000K	80	CREE	
U-D025-COB6-30W-30	2800Lm	30W	100-240V	50°	3000K	80	CREE	
U-D025-COB6-30W-40	2800Lm	30W	100-240V	50°	4000K	80	CREE	
U-D025-COB6-30W-60	2800Lm	30W	100-240V	50°	6000K	80	CREE	

U-D025-COB6-25W-30

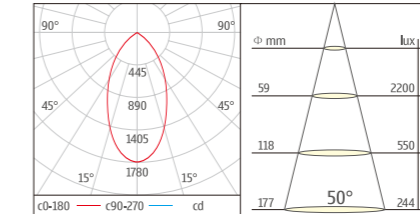

U-D025-COB6-30W-30

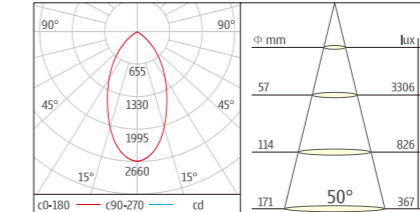

Efficiency:80 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee


U-D025-COB Downlight

IP54 High efficiency Alum-Mirror UGR <19



Housing: Die-cast aluminum
Reflector: >85%

U-D025-COB8 Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 3200lm
SIZE: 540X540X540mm
CTN: 27PCS




STANDARD MODEL


CREE LED

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D025-COB8-35W-30	2800Lm	35W	100-240V	50°	3000K	80	CREE
U-D025-COB8-35W-40	2800Lm	35W	100-240V	50°	4000K	80	CREE
U-D025-COB8-35W-60	2800Lm	35W	100-240V	50°	6000K	80	CREE
U-D025-COB8-40W-30	3200Lm	40W	100-240V	50°	3000K	80	CREE
U-D025-COB8-40W-40	3200Lm	40W	100-240V	50°	4000K	80	CREE
U-D025-COB8-40W-60	3200Lm	40W	100-240V	50°	6000K	80	CREE


U-D025-COB8-35W-30

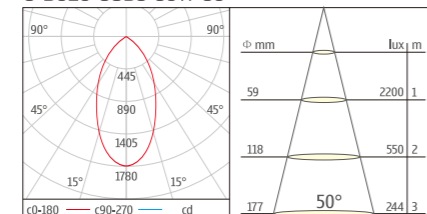

U-D025-COB8-40W-30

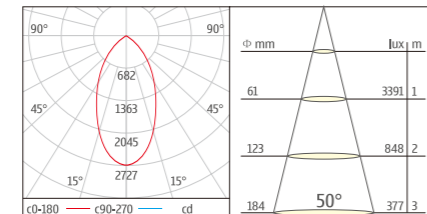

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee


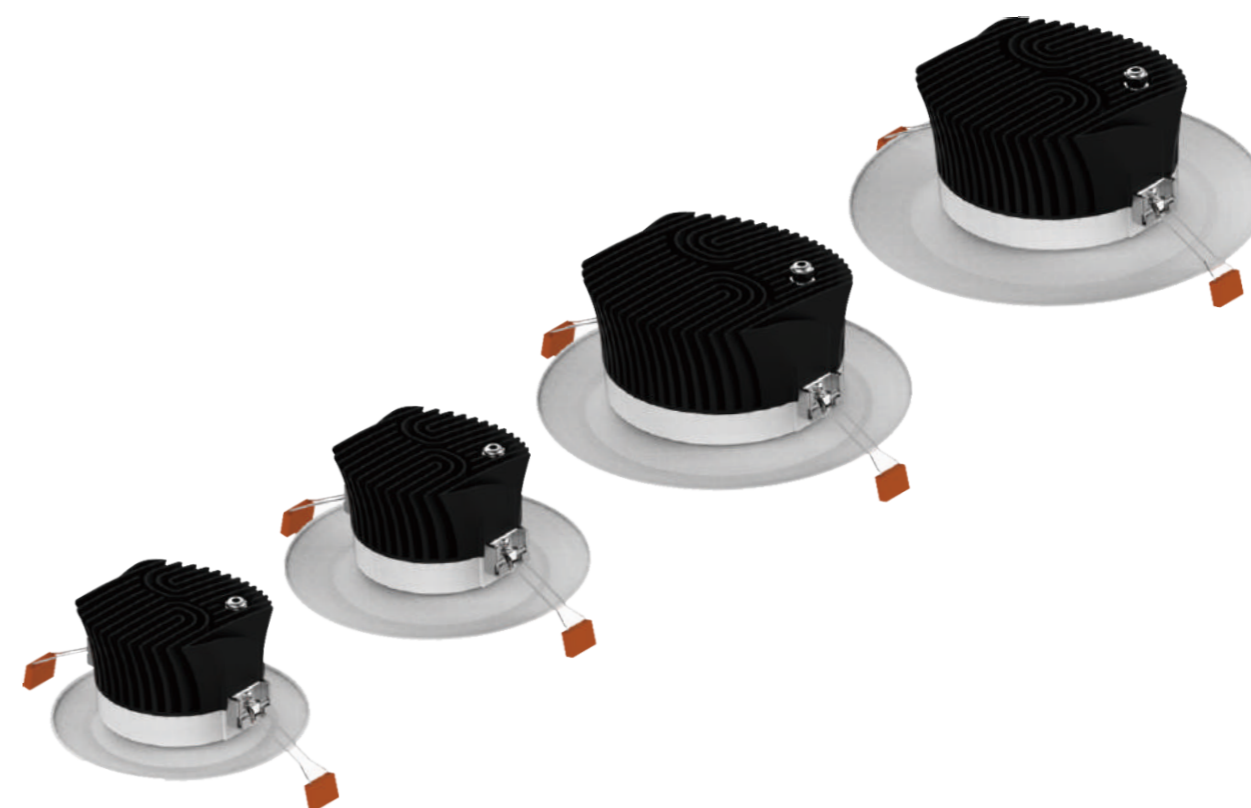




SMD LEDs

Feature:

- Products adopt deep anti-glare design, solved traditional glare eyes problem.
- Heatsink adopt high purity aluminum material, give optimal passive heat dissipation of the LED ARRAY. Increase Led lifespan and light efficiency.
- Suitable for Hotels. Museum. Shopping Mall.

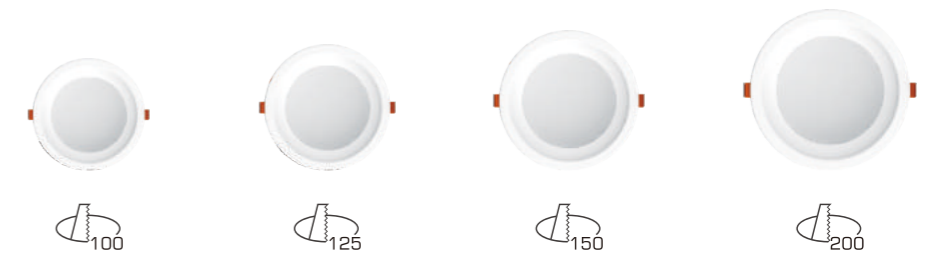

Models: U-D026-SMD4-10W U-D026-SMD5-13W U-D026-SMD6-16W U-D026-SMD8-21W
 Wattage: 10W-21W
 Lumen: 800Lm-1450Lm



Feature:

- The lighting fixture are anti-glare design.
- Suitable LED Chip: Lighting fixture is suitable for SMD LED Chip.
The structure parts are designed base on CREE, Bridgelux, Cree SMD LED Chip.
- Material: The material of Heatsink, reflector, front ring is high purity aluminium.
Heatsink and front ring are connected by rotation way.
- Appearance and structure are patented. Easy installation can save much labor cost.
- Beam angle: 90°

Application:

- Home furnishing ,Boutique Traders Hotl, bazaar brand chain stores and other indoor lighting area

U-D026-SMD Downlight


IP20 High efficiency Alumi-Mirror F CE UGR <19



Housing: Die-cast aluminum
Reflector: >85%

U-D026-SMD4-10W Downlight Series


With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 750Lm
SIZE: 480X480X510mm
CTN:27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D026-SMD4-10W-30	700Lm	10W	100-240V	90°	3000K	80	REFOND
U-D026-SMD4-10W-40	700Lm	10W	100-240V	90°	4000K	80	REFOND
U-D026-SMD4-10W-60	700Lm	10W	100-240V	90°	6000K	80	REFOND

U-D026-SMD4-10W-30

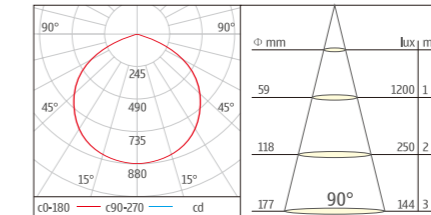

Efficiency: 75 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee


U-D026-SMD Downlight

IP20 High efficiency Alumi-Mirror F CE UGR <19



Housing: Die-cast aluminum
Reflector: >85%


U-D026-SMD5-13W Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output:975Lm
SIZE: 550X550X550mm
CTN:27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D026-SMD5-13W-30	900Lm	13W	100-240V	90°	3000K	80	REFOND
U-D026-SMD5-13W-40	900Lm	13W	100-240V	90°	4000K	80	REFOND
U-D026-SMD5-13W-60	900Lm	13W	100-240V	90°	6000K	80	REFOND

U-D026-SMD5-13W-30

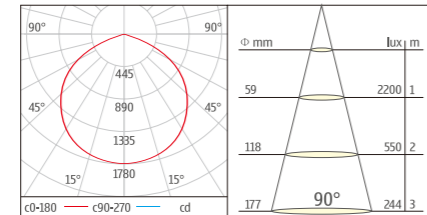

Efficiency:75 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee


U-D026-SMD Downlight

IP20 High efficiency Alumi-Mirror F CE UGR <19



Housing: Die-cast aluminum
Reflector: >85%


U-D026-SMD6-16W Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output:1350Lm
SIZE: 550X550X550mm
CTN:27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D026-SMD6-16W-30	1100Lm	16W	100-240V	90°	3000K	80	REFOND
U-D026-SMD6-16W-40	1100Lm	16W	100-240V	90°	4000K	80	REFOND
U-D026-SMD6-16W-60	1100Lm	16W	100-240V	90°	6000K	80	REFOND

U-D026-SMD6-16W-30

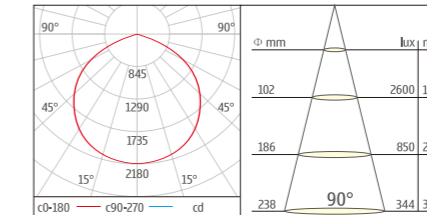

Efficiency:75 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee


U-D026-SMD Downlight

IP20 High efficiency Alum-Mirror F CE UGR <19



Housing: Die-cast aluminum
Reflector: >85%


U-D026-SMD8-21W Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1500Lm
SIZE: 540X540X540mm
CTN:27PCS




STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D026-SMD8-21W-30	1450Lm	21W	100-240V	90°	3000K	80	REFOND
U-D026-SMD8-21W-40	1450Lm	21W	100-240V	90°	4000K	80	REFOND
U-D026-SMD8-21W-60	1450Lm	21W	100-240V	90°	6000K	80	REFOND

U-D026-SMD8-21W-30

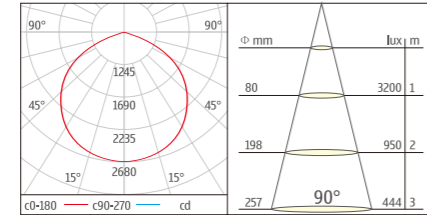

Efficiency: 75 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

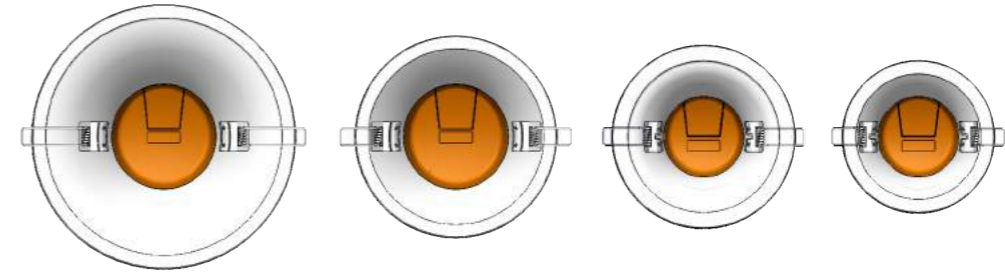



SMD LEDs

Feature:

- Products adopt deep anti-glare design, solved traditional glare eyes problem.
- Heatsink adopt high purity aluminum material, give optimal passive heat dissipation of the LED ARRAY. Increase Led lifespan and light efficiency.
- Suitable for Hotels. Museum. Shopping Mall.



Models: U-D007-SMD3-8W U-D007-SMD4-10W U-D007-SMD5-13W U-D007-SMD6-16W U-D007-SMD8-20W
 Wattage: 8W-21W
 Lumen: 500Lm-1450Lm




U-D007-SMD Downlight

IP20 High efficiency Alumi-Mirror F CE



Housing: Die-cast aluminum
Reflector: >85%


U-D007-SMD3-8W Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output:600Lm
SIZE: 480X480X510mm
CTN:27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D007-SMD3-8W-30	500Lm	8W	100-240V	90°	3000K	80	REFOND
U-D007-SMD3-8W-40	500Lm	8W	100-240V	90°	4000K	80	REFOND
U-D007-SMD3-8W-60	500Lm	8W	100-240V	90°	6000K	80	REFOND

U-D007-SMD3-8W-30

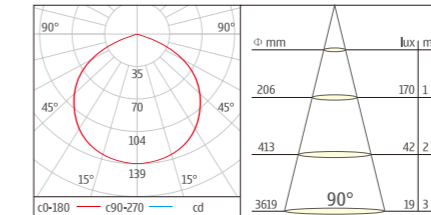

Efficiency:75 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee



Feature:

- Ultra-thin integrated design with built-in driver.
- High purity aluminum body with imported PS diffuser.
- Spring:Spring is patented and named "angel's wing".
- Material: High purity aluminium material.
- Driver: Two option: Concatenate style and separate style .
Driver separate style is used in ceiling temperature less than 90°.

Application:


- Home furnishing ,Boutique Traders Hotl, bazaar brand chain stores and other indoor lighting area

U-D007-SMD Downlight



Housing: Die-cast aluminum
Reflector: >85%


U-D007-SMD4-10W Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 750Lm
SIZE: 480X480X510mm
CTN:27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D007-SMD4-10W-30	700Lm	10W	100-240V	90°	3000K	80	REFOND
U-D007-SMD4-10W-40	700Lm	10W	100-240V	90°	4000K	80	REFOND
U-D007-SMD4-10W-60	700Lm	10W	100-240V	90°	6000K	80	REFOND

U-D007-SMD4-10W-30

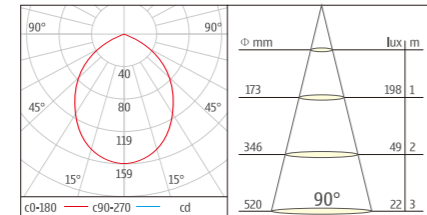


Efficiency: 75 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

U-D007-SMD Downlight



Housing: Die-cast aluminum
Reflector: >85%


U-D007-SMD5-13W Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 975Lm
SIZE: 550X550X550mm
CTN:27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D007-SMD5-13W-30	900Lm	13W	100-240V	80°	3000K	80	REFOND
U-D007-SMD5-13W-40	900Lm	13W	100-240V	80°	4000K	80	REFOND
U-D007-SMD5-13W-60	900Lm	13W	100-240V	80°	6000K	80	REFOND

U-D007-SMD5-13W-30

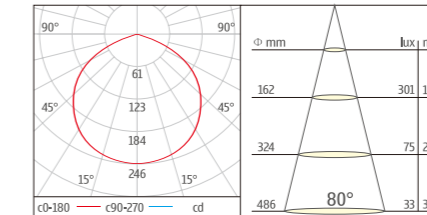


Efficiency: 75 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

U-D007-SMD Downlight



Housing: Die-cast aluminum
Reflector: >85%


U-D007-SMD6-16W Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1350Lm
SIZE: 550X550X550mm
CTN:27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D007-SMD6-16W-30	1100Lm	16W	100-240V	80°	3000K	80	REFOND
U-D007-SMD6-16W-40	1100Lm	16W	100-240V	80°	4000K	80	REFOND
U-D007-SMD6-16W-60	1100Lm	16W	100-240V	80°	6000K	80	REFOND

U-D007-SMD6-16W-30

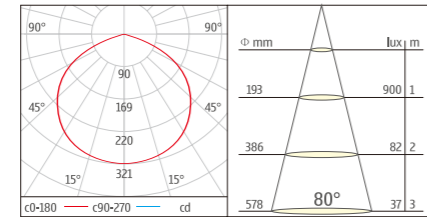


Efficiency: 75 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

U-D007-SMD Downlight



Housing: Die-cast aluminum
Reflector: >85%


U-D007-SMD8-20W Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1500Lm
SIZE: 540X540X540mm
CTN:27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D007-SMD8-20W-30	1500Lm	20W	100-240V	90°	3000K	80	REFOND
U-D007-SMD8-20W-40	1500Lm	20W	100-240V	90°	4000K	80	REFOND
U-D007-SMD8-20W-60	1500Lm	20W	100-240V	90°	6000K	80	REFOND

U-D007-SMD8-20W-30

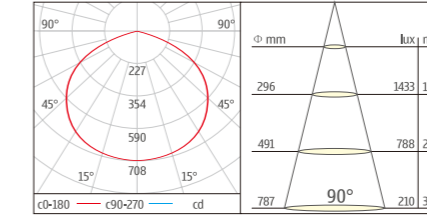

Efficiency: 75 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee



SQUARE COB



ROUND COB



ROUND SMD




- Novel product design, simple appearance. Cylinder and square style available.
- Suitable Lamp: COB, SMD and Mouldle. choose different lamp based on different application requirement.
- Suitable for Hotels .Museum Shopping Mall etc.




CREE LEDs

Feature:

- Products adopt deep anti-glare design, solved traditional glare eyes problem.
- Heatsink adopt high purity aluminum material, give optimal passive heat dissipation of the LED ARRAY. Increase Led lifespan and light efficiency.
- Suitable for Hotels, Museum, Shopping Mall.

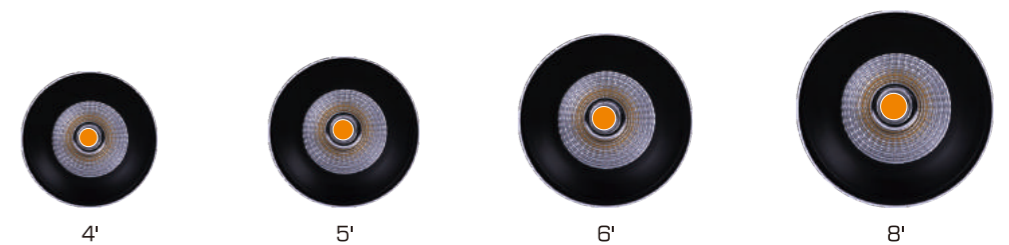

Models: U-SD010-COB4 U-SD010-COB5 U-SD010-COB6 U-SD010-COB8
 Wattage: 13W-52W
 Lumen: 1000Lm-4600Lm

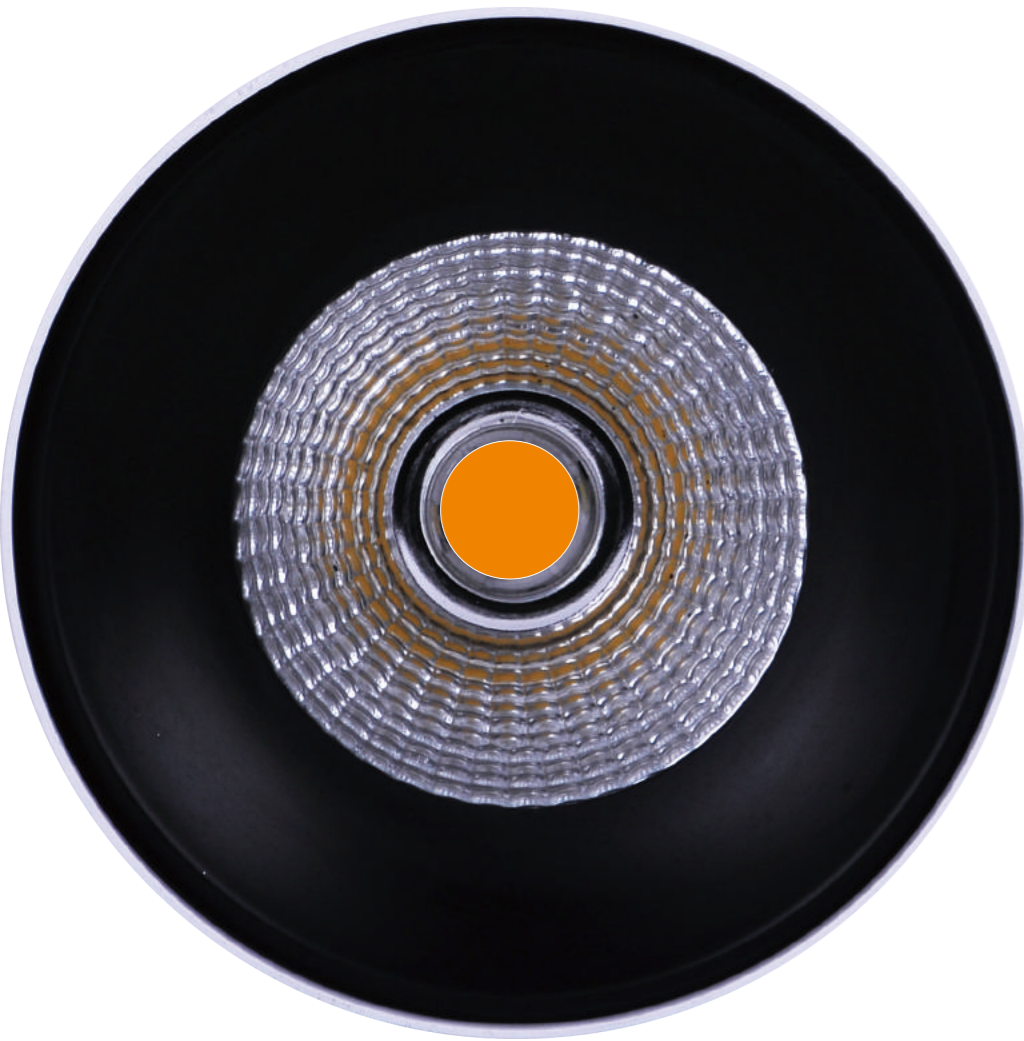

Surface mounted - COB

- Size: 4"/6"
- Wattage: 18W/ 25W
- Size: Φ140xH150 / Φ170xH160
- Light guide pipe: Light more soft and anti-glare.
- Extraordinary Reflector: Reflector outer ring colorful painted.
- Fast and convenient installation. Simple appearance, no screw seen.
- Surface mounted, ceiling and pendant style.



Application:

- Home furnishing ,Boutique Traders Hotel, bazaar brand chain stores and other indoor lighting area

Mounting ring color




U-SD010-COB Surface mounted

IP20 High efficiency Lumi-Mirror F CE UGR <19



Housing: Die-cast aluminum Reflector: >85%

U-SD010-COB4 Surface mounted Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1600lm
SIZE: 480X480X510mm
CTN:27PCS




STANDARD MODEL




ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-SD010-COB4-10W-30	800Lm	10W	100-240V	40/60°	3000K	80	CREE
U-SD010-COB4-10W-40	800Lm	10W	100-240V	40/60°	4000K	80	CREE
U-SD010-COB4-10W-60	800Lm	10W	100-240V	40/60°	6000K	80	CREE
U-SD010-COB4-15W-30	1200Lm	15W	100-240V	40/60°	3000K	80	CREE
U-SD010-COB4-15W-40	1200Lm	15W	100-240V	40/60°	4000K	80	CREE
U-SD010-COB4-15W-60	1200Lm	15W	100-240V	40/60°	6000K	80	CREE

U-SD010-COB4-10W-30

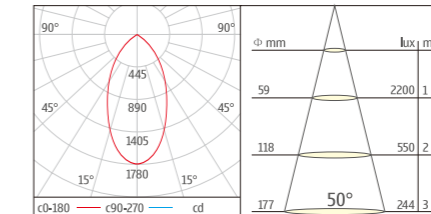

U-SD010-COB4-15W-30

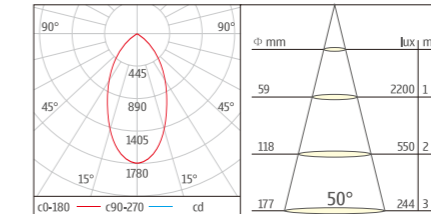

Efficiency:70 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee


U-SD010-COB Surface mounted

IP20 High efficiency Alum-Mirror F CE UGR <19




Housing: Die-cast aluminum
Reflector: >85%

U-SD010-COB5 Surface mounted Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output:2000lm
SIZE: 550X550X550mm
CTN:27PCS




STANDARD MODEL		CREE LEDs						
ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand	
U-SD010-COB5-15W-30	1200Lm	15W	100-240V	50°	3000K	80	CREE	
U-SD010-COB5-15W-40	1200Lm	15W	100-240V	50°	4000K	80	CREE	
U-SD010-COB5-15W-60	1200Lm	15W	100-240V	50°	6000K	80	CREE	
U-SD010-COB5-20W-30	1600Lm	20W	100-240V	50°	3000K	80	CREE	
U-SD010-COB5-20W-40	1600Lm	20W	100-240V	50°	4000K	80	CREE	
U-SD010-COB5-20W-60	1600Lm	20W	100-240V	50°	6000K	80	CREE	

U-SD010-COB5-15W-30

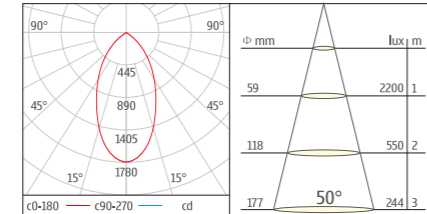

U-SD010-COB5-20W-30

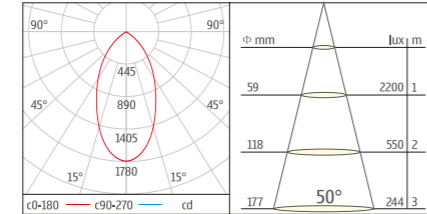

Efficiency:80 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee


U-SD010-COB Surface mounted

IP20 High efficiency Alum-Mirror F CE UGR <19




Housing: Die-cast aluminum
Reflector: >85%

U-SD010-COB6 Surface mounted Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output:2400lm
SIZE: 550X550X550mm
CTN:27PCS




STANDARD MODEL		CREE LEDs						
ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand	
U-SD010-COB6-20W-30	2400Lm	20W	100-240V	50°	3000K	80	CREE	
U-SD010-COB6-20W-40	2400Lm	20W	100-240V	50°	4000K	80	CREE	
U-SD010-COB6-20W-60	2400Lm	20W	100-240V	50°	6000K	80	CREE	
U-SD010-COB6-25W-30	2800Lm	25W	100-240V	50°	3000K	80	CREE	
U-SD010-COB6-25W-40	2800Lm	25W	100-240V	50°	4000K	80	CREE	
U-SD010-COB6-25W-60	2800Lm	25W	100-240V	50°	6000K	80	CREE	

U-SD010-COB6-20W-30

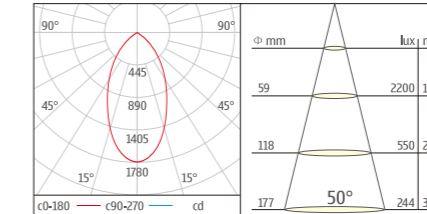

U-SD010-COB6-25W-30

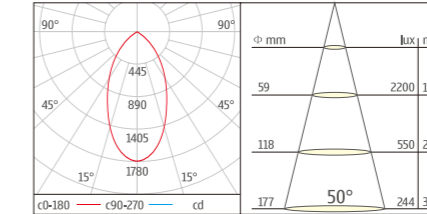

Efficiency:80 Lm/W
Life time:30.000 hours(70% Lumen maintenance)
3 Years Guarantee


U-SD010-COB Surface mounted

IP20 High efficiency Alum-Mirror F CE UGR <19



Housing: Die-cast aluminum
Reflector: >85%

U-SD010-COB8 Surface mounted Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 3200lm
SIZE: 540X540X540mm
CTN: 27PCS




STANDARD MODEL




ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-SD010-COB8-25W-30	2000Lm	25W	100-240V	50°	3000K	80	CREE
U-SD010-COB8-25W-40	2000Lm	25W	100-240V	50°	4000K	80	CREE
U-SD010-COB8-25W-60	2000Lm	25W	100-240V	50°	6000K	80	CREE
U-SD010-COB8-30W-30	2400Lm	30W	100-240V	50°	3000K	80	CREE
U-SD010-COB8-30W-40	2400Lm	30W	100-240V	50°	4000K	80	CREE
U-SD010-COB8-30W-60	2400Lm	30W	100-240V	50°	6000K	80	CREE


U-SD010-COB8-25W-30


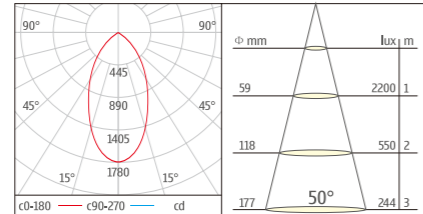


U-SD010-COB8-30W-30

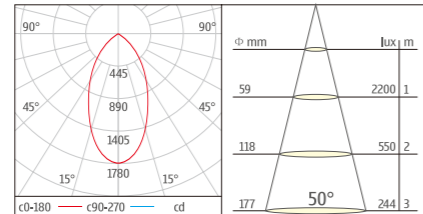

Efficiency: 80 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

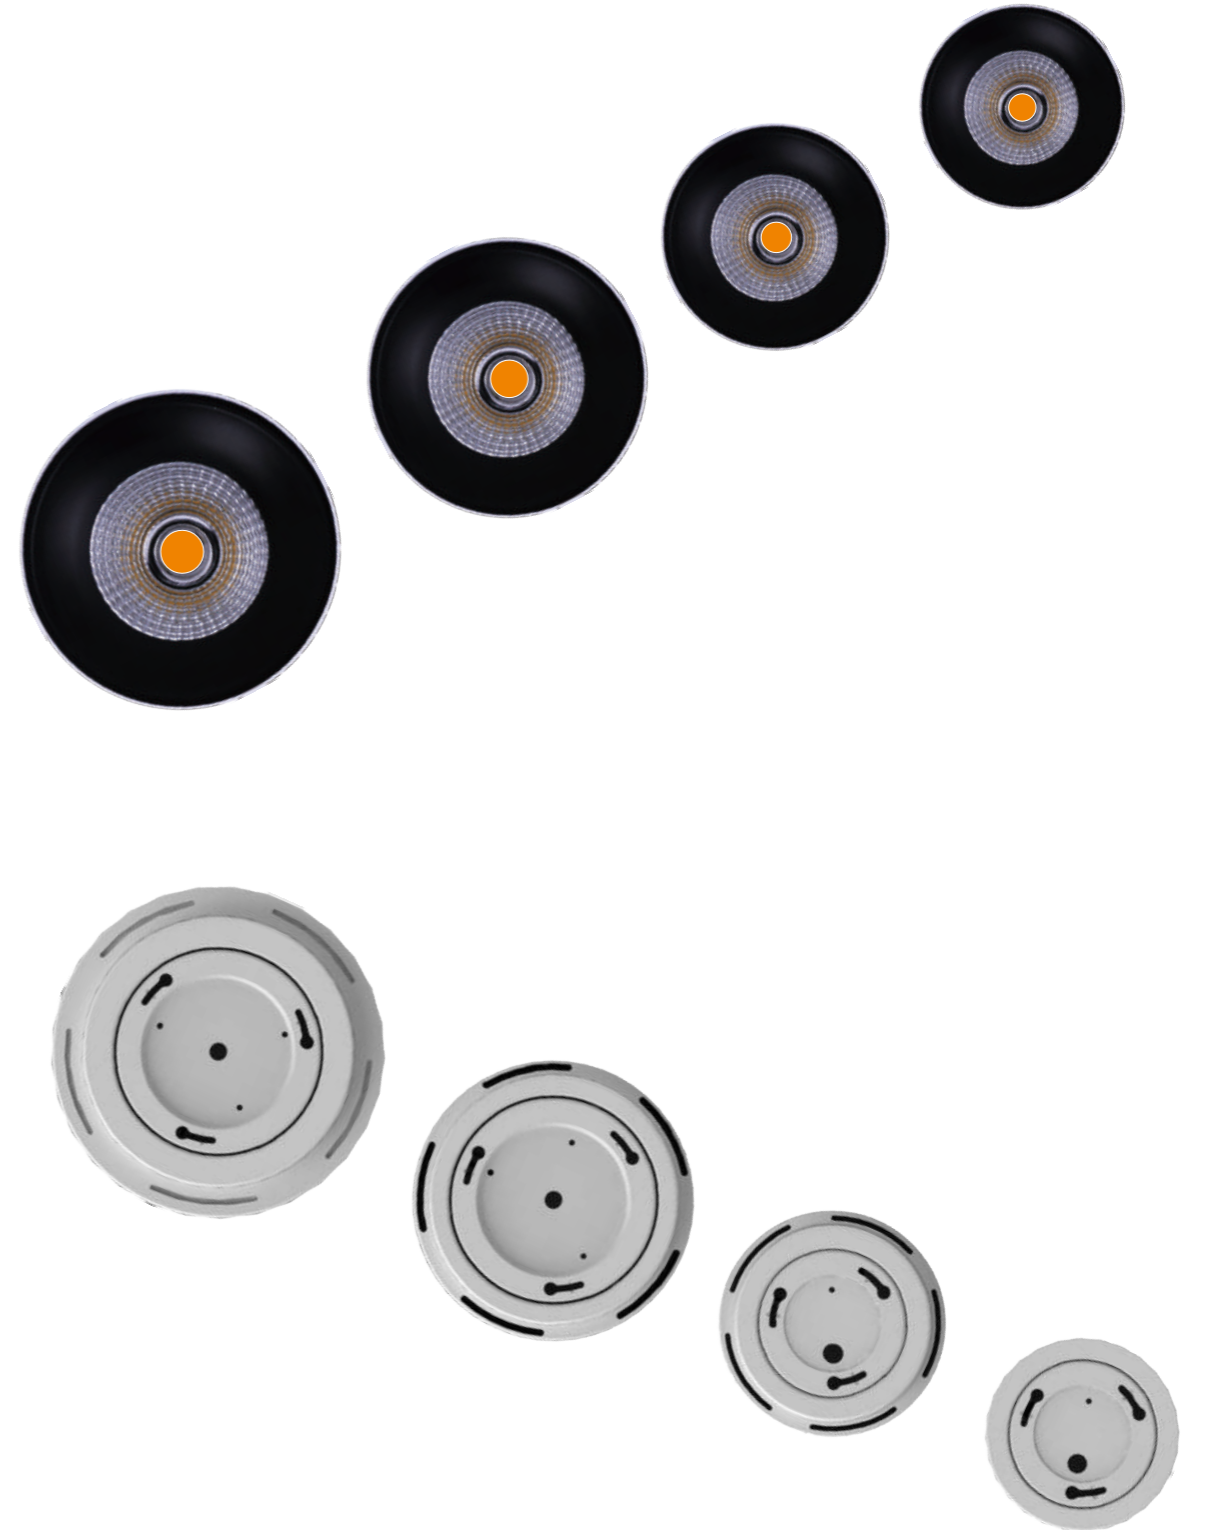


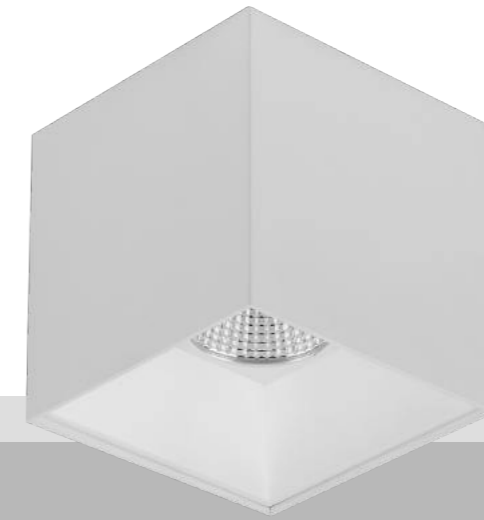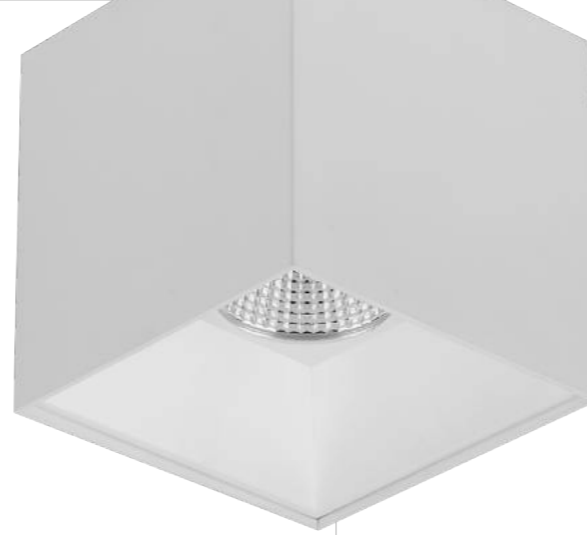

CREE LEDs

Feature:

- Products adopt deep anti-glare design, solved traditional glare eyes problem.
- Heatsink adopt high purity aluminum material, give optimal passive heat dissipation of the LED ARRAY. Increase Led lifespan and light efficiency.
- Suitable for Hotels, Museum, Shopping Mall.



4"



6"

Models: U-SD013-COB4 U-SD013-COB5 U-SD013-COB6 U-SD013-COB8
 Wattage: 15W-25W
 Lumen: 1100Lm-2000Lm



U-SD013-COB Surface mounted

IP20 High efficiency Alumi-Mirror F CE UGR <19



Housing: Die-cast aluminum
Reflector: >85%

U-SD013-COB4 Surface mounted Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1600lm
SIZE: 480X480X510mm
CTN:27PCS




STANDARD MODEL




ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-SD013-COB4-15W-30	1100Lm	15W	100-240V	40°	3000K	80	CREE
U-SD013-COB4-15W-40	1100Lm	15W	100-240V	40°	4000K	80	CREE
U-SD013-COB4-15W-60	1100Lm	15W	100-240V	40°	6000K	80	CREE
U-SD013-COB4-20W-30	1500Lm	20W	100-240V	40°	3000K	80	CREE
U-SD013-COB4-20W-40	1500Lm	20W	100-240V	40°	4000K	80	CREE
U-SD013-COB4-20W-60	1500Lm	20W	100-240V	40°	6000K	80	CREE

U-SD013-COB4-15W-30

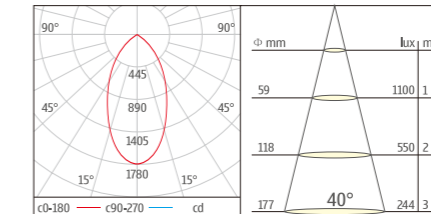

U-SD013-COB4-20W-30

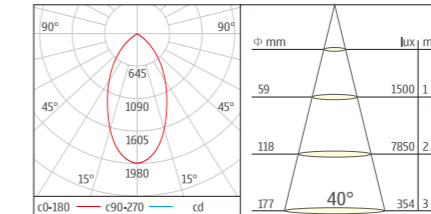

Efficiency: 70 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee



Surface mounted - COB


- Size: 4"/6"
- Wattage: 18W/ 25W
- Product Size: 120x120x100 150x150x150
- Light guide pipe: Light more soft and anti-glare.
- Extraordinary Reflector: Reflector outer ring colorful painted.
- Fast and convenient installation. Simple appearance, no screw seen.
- Surface mounted, ceiling and pendant style.

Application:

- Home furnishing ,Boutique Traders Hotl, bazaar brand chain stores and other indoor lighting area


U-SD013-COB Surface mounted

IP20 High efficiency Alum-Mirror F CE UGR <19

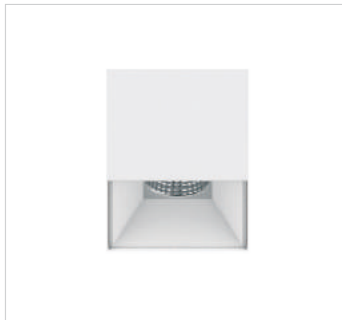

Housing: Die-cast aluminum
Reflector: >85%

U-SD013-COB6 Surface mounted Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 2400lm
SIZE: 550X550X550mm
CTN: 27PCS




STANDARD MODEL




ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-SD013-COB6-20W-30	1500Lm	20W	100-240V	40°	3000K	80	CREE
U-SD013-COB6-20W-40	1500Lm	20W	100-240V	40°	4000K	80	CREE
U-SD013-COB6-20W-60	1500Lm	20W	100-240V	40°	6000K	80	CREE
U-SD013-COB6-25W-30	1500Lm	25W	100-240V	40°	3000K	80	CREE
U-SD013-COB6-25W-40	2000Lm	25W	100-240V	40°	4000K	80	CREE
U-SD013-COB6-25W-60	2000Lm	25W	100-240V	40°	6000K	80	CREE




U-SD013-COB6-20W-30

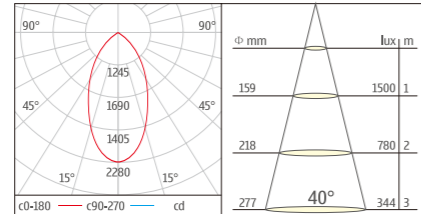

U-SD013-COB6-25W-30

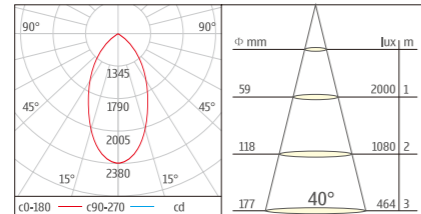

Efficiency: 80 Lm/W
Life time: 30.000 hours (70% Lumen maintenance)
3 Years Guarantee





SMD LEDs

Feature:


- Material: The entire lighting fixture is made of high purity aluminium.
- Cooling: Both housing and heat sink ensure cooling system.
- Convectional structure ensure cooling system.
- Light guide pipe: Make light more soft and anti-glare.
- Fast and convenient installation. Simple appearance, no screw seen.
- Surface mounted and pendant style available.



4'



6'



8'

Models: U-D011-SMD4 U-D011-SMD6 U-D011-SMD8
 Wattage: 10W-20W
 Lumen: 700Lm-1500Lm




Surface mounted - SMD

- Size: 4"/6"/8"
- Wattage: 15W/ 25W/ 30W
- Size: R: $\Phi 130 \times H100$ / $\Phi 165 \times H115$ / $\Phi 200 \times H130$
- Fast and convenient installation. Simple appearance, no screw seen.
- Surface mounted, ceiling and pendant style.

Application:

- Home furnishing ,Boutique Traders Hotl, bazaar brand chain stores and other indoor lighting area

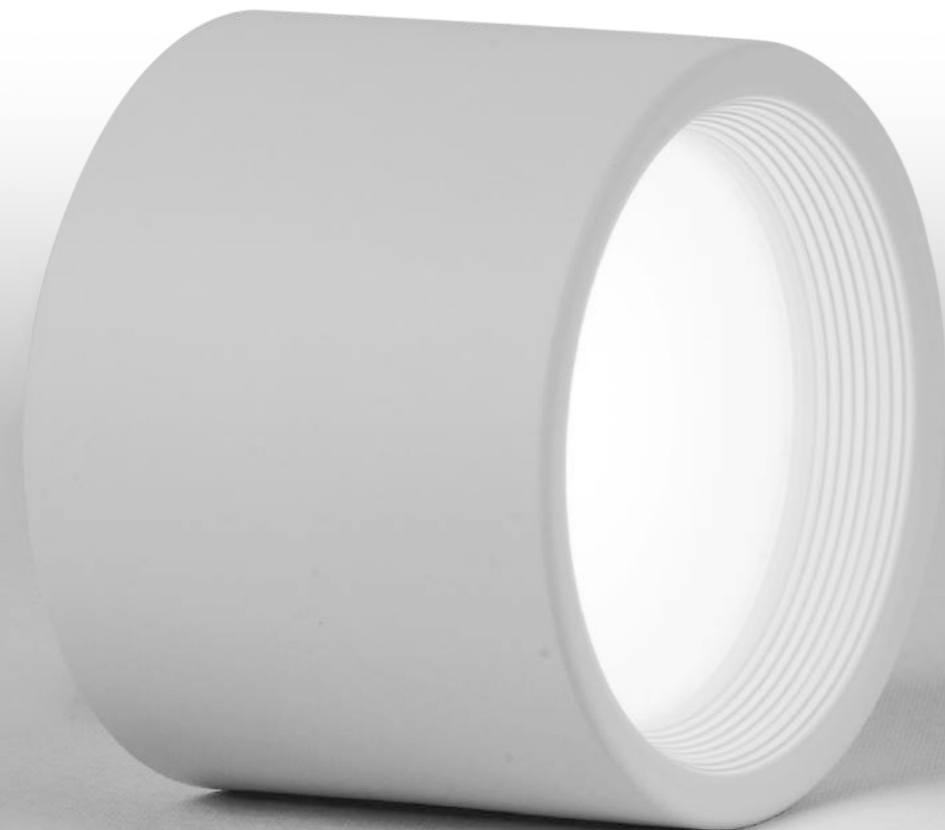


U-D011-SMD Downlight



Housing: Die-cast aluminum
Reflector: >85%

U-D011-SMD4 Downlight Series


With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 750Lm
SIZE: 480X480X510mm
CTN:27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D011-SMD4-30	750Lm	10W	100-240V	90°	3000K	80	REFOND
U-D011-SMD4-40	750Lm	10W	100-240V	90°	4000K	80	REFOND
U-D011-SMD4-60	750Lm	10W	100-240V	90°	6000K	80	REFOND

U-D011-SMD4-30

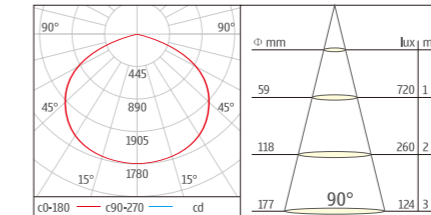


Efficiency: 75 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

U-D011-SMD Downlight



Housing: Die-cast aluminum
Reflector: >85%


U-D011-SMD6 Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1350Lm
SIZE: 550X550X550mm
CTN:27PCS



STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D011-SMD6-30	1350Lm	16W	100-240V	90°	3000K	80	REFOND
U-D011-SMD6-40	1350Lm	16W	100-240V	90°	4000K	80	REFOND
U-D011-SMD6-60	1350Lm	16W	100-240V	90°	6000K	80	REFOND

U-D011-SMD6-30

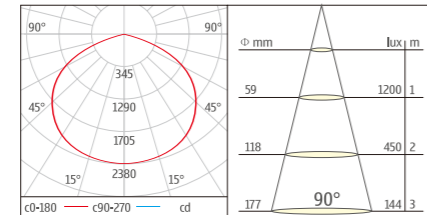


Efficiency: 75 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

U-D011-SMD Downlight



Housing: Die-cast aluminum
Reflector: >85%


U-D011-SMD8 Downlight Series
With external LED DRIVER (Dimmable or Non-Dimmable)
Lumen output: 1500Lm
SIZE: 540X540X540mm
CTN:27PCS




STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
U-D011-SMD8-30	1500Lm	20W	100-240V	90°	3000K	80	REFOND
U-D011-SMD8-40	1500Lm	20W	100-240V	90°	4000K	80	REFOND
U-D011-SMD8-60	1500Lm	20W	100-240V	90°	6000K	80	REFOND


U-D011-SMD8-30

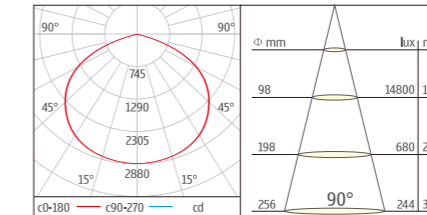

Efficiency: 75 Lm/W
Life time: 30,000 hours (70% Lumen maintenance)
3 Years Guarantee

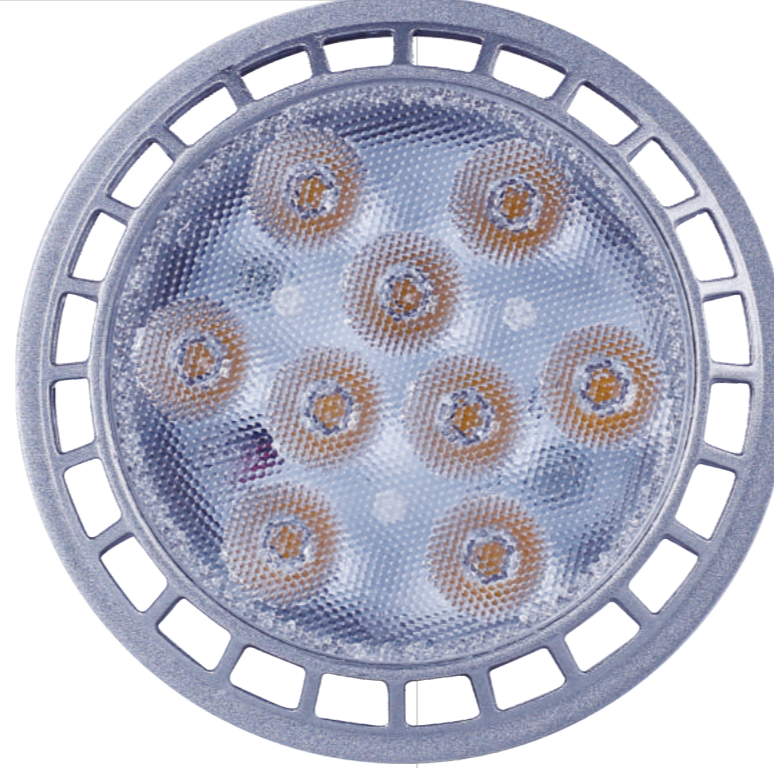

Comparison of cost simulation

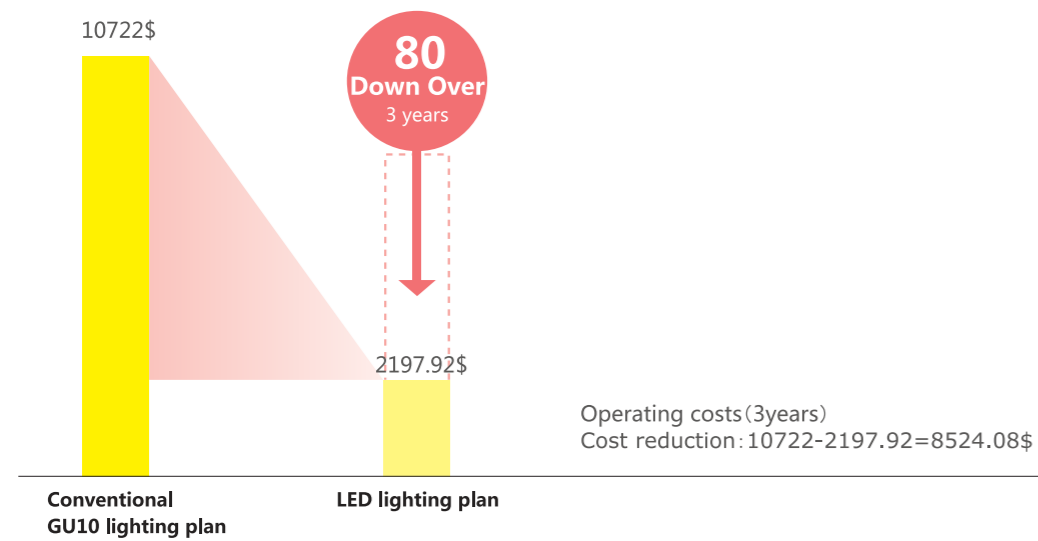

1. Take 100pcs GU10, for sample: 12business hours/day, 360business days/yr, Power cost: \$0.14/kwh (Excludes basic rate)

2. GU10 bulb(50W), 1.5€/pcs; GU10 lamp, 6\$/pcs; 2000 hours of working lifetime:

a: Lamp cost: $(1.5 \times 7 + 6) \times 100 = 1650\$$

b: Electricity cost: $50w \times 360 \times 1.2 \times 3 \times 100 / 1000 = 64800 \text{ 千瓦} \times 0.14\$ = 9072\$$

c: $9072 + 1650 = 10722\$$


3. UNITE LED Lighting(5.5W), 12\$/pcs; 13000 hours of working lifetime. (Equivalent to 7pcs GU10)

a: Lamp cost: $12 \times 100 = 1200\$$

b: Electricity cost: $5.5W \times 360 \times 12 \times 3 \times 100 / 1000 = 7128KW \times 0.14\$ = 997.92\$$

c: $997.92 + 1200 = 2197.92\$$

Reduction in CO2 Emissions

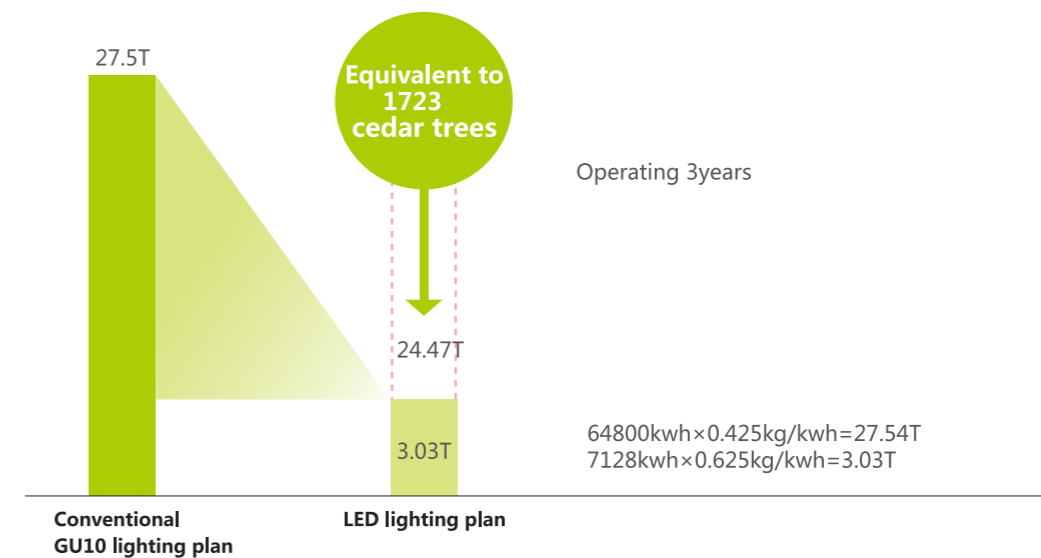

1. Take 100pcs GU10, for sample: 12business hours/day, 360business days/yr, Co2 emissions: 0.425kg/kwh Take 100pcs GU10, for sample,

2. Annual CO2 absorption by cedar trees: Approx. 14.2tonnes (assuming 1000 trees/na)*

Gu10 / PAR20 LED Lamp



Housing: Die-cast aluminum


GU10-SMD LED lamp Series
 With external LED DRIVER (Dimmable or Non-Dimmable)
 Lumen output: 319lm
 SIZE: 540X425X415mm
 CTN: 50PCS

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
GU10-SMD-30	319Lm	5W	100-240V	27°	3000K	80	REFOND
GU10-SMD-40	319Lm	5W	100-240V	27°	4000K	80	REFOND
GU10-SMD-60	319Lm	5W	100-240V	27°	6000K	80	REFOND



GU10-SMD-30

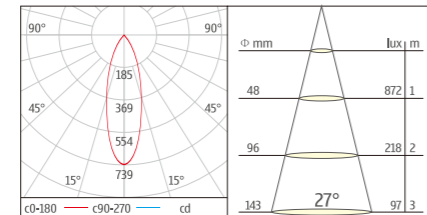

Efficiency: 75 Lm/W
 Life time: 20,000 hours (70% Lumen maintenance)
 2 Years Guarantee



Housing: Die-cast aluminum


PAR20-SMD LED lamp Series
 With external LED DRIVER (Dimmable or Non-Dimmable)
 Lumen output: 622lm
 SIZE: 530X385X450mm
 CTN: 50PCS

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
PAR20-SMD-30	622Lm	9W	100-240V	24°	3000K	80	REFOND
PAR20-SMD-40	622Lm	9W	100-240V	24°	4000K	80	REFOND
PAR20-SMD-60	622Lm	9W	100-240V	24°	6000K	80	REFOND



PAR20-SMD-30

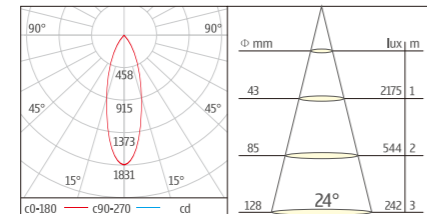

Efficiency: 75 Lm/W
 Life time: 20,000 hours (70% Lumen maintenance)
 2 Years Guarantee

PAR30 / PAR38 LED Lamp



Housing: Die-cast aluminum


PAR30-SMD LED lamp Series
 With external LED DRIVER (Dimmable or Non-Dimmable)
 Lumen output: 841lm
 SIZE: 640X435X465mm
 CTN: 50PCS

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
PAR30-SMD-30	841Lm	11W	100-240V	20°	3000K	80	REFOND
PAR30-SMD-40	841Lm	11W	100-240V	20°	4000K	80	REFOND
PAR30-SMD-60	841Lm	11W	100-240V	20°	6000K	80	REFOND



PAR30-SMD-30

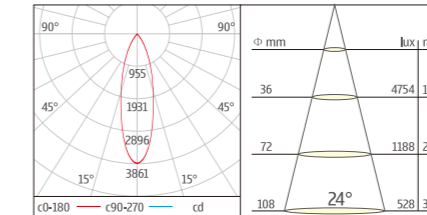

Efficiency: 75 Lm/W
 Life time: 20,000 hours (70% Lumen maintenance)
 2 Years Guarantee



Housing: Die-cast aluminum


PAR38-SMD LED lamp Series
 With external LED DRIVER (Dimmable or Non-Dimmable)
 Lumen output: 1133lm
 SIZE: 640X435X465mm
 CTN: 50PCS

STANDARD MODEL

ORDER NO	Lumen output	Led Power	Voltage	Beam Angle	CCT	CRI	LED Brand
PAR38-SMD-30	1133Lm	16W	100-240V	19°	3000K	80	REFOND
PAR38-SMD-40	1133Lm	16W	100-240V	19°	4000K	80	REFOND
PAR38-SMD-60	1133Lm	16W	100-240V	19°	6000K	80	REFOND



PAR38-SMD-30

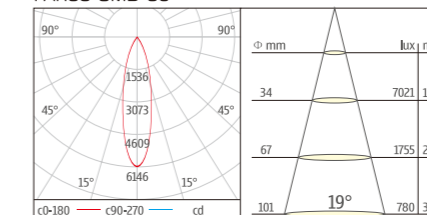

Efficiency: 75 Lm/W
 Life time: 20,000 hours (70% Lumen maintenance)
 2 Years Guarantee